



BEAM TYPE TORQUE WRENCH




- Comfortable palm-fit handle makes the user grip easily and apply accurate pull.
- Dual scale plate offers metric and English torque units.
- Pointer indicates the current torque and the scale is easily read.
- Pointer moves clockwise or counterclockwise direction.

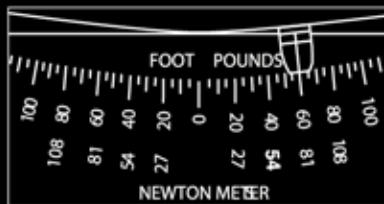

Dual Scale



Moveable Handle

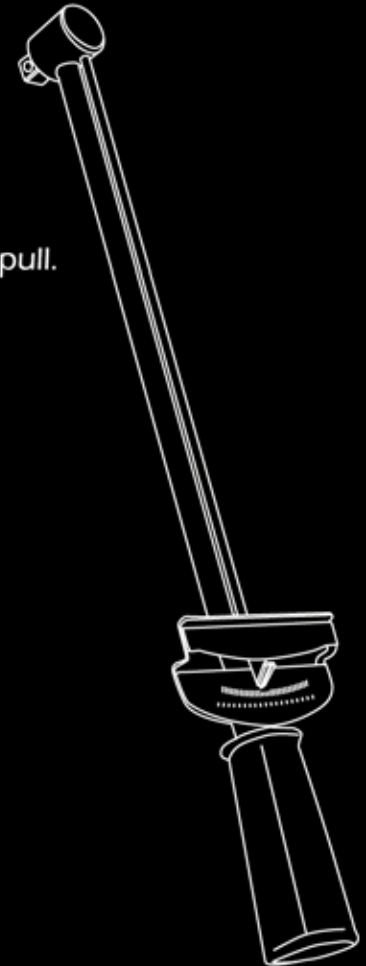

	Driver Square	lbf-ft	Length	Weight
11060411	1/2"	0-150	490mm	0.76Kgs



	Driver Square	lbf-in	Length	Weight
11060412	3/8"	0-600	410mm	0.5Kgs




	Driver Square	lbf-in	Length	Weight
1106413	1/4"	0-80	285mm	0.16Kgs

CLASSIC TRADITIONAL MECHANICAL TORQUE WRENCH




- Heavy-duty using, and high quality.
- Clear scale stamped on steel handle. (Nm · kgm · Lbf.in · Lbf.ft)
- Adjusting bar to set torque value, and stop setting when pushing back the adjusting bar.
- Dual direction for easy repairing and fastening. (Easy-pushing driver)
- Clear loud sound indication when reaching target torque value.
- Length independent mechanism to retain torque stable.
- Following ISO 6789 standard.
- Tolerance accuracy $\pm 4\%$

■ SETTING TORQUE

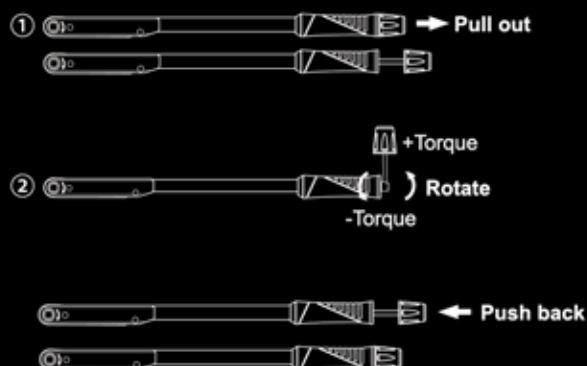


■ OPERATION

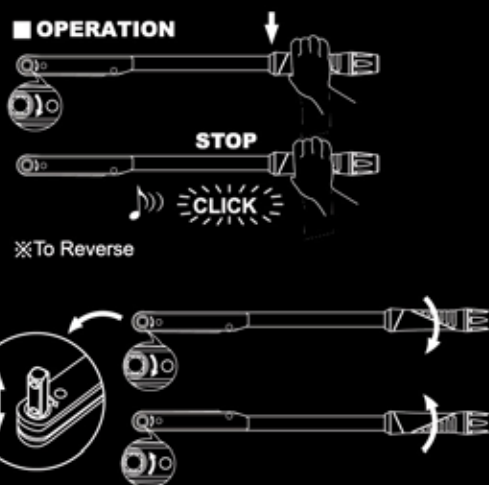


• Driver Square

Item No.	32060481	32060482	32060483	32060484	32060485	32060440	32060486
Driver Square	1/4"	3/8"	3/8"	1/2"	1/2"	3/4"	1"
Torque Wrench Item No.	12140014	12140013 12140012	12140011	12140010	12140006 12140007 12140008	12140015 12140016	12140017






	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140014	1/4"	2.5-11	0.3-1.2	20-100	2-8	0.8Kgs	320mm
12140013	3/8"	2.5-11	0.3-1.2	20-100	2-8	0.8Kgs	320mm



	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140012	3/8"	5-33	0.5-3.4	40-300	4-24	1.04Kgs	425mm




	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140011	3/8"	12-68	1.2-7	100-600	10-50	1.6Kgs	475mm
12140010	1/2"	12-68	1.2-7	100-600	10-50	1.6Kgs	475mm




	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140006	1/2"	25-135	3-14	200-1200	20-100	1.93Kgs	550mm




	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140007	1/2"	50-225	5-23	400-2000	40-160	1.95Kgs	360mm




	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140008	1/2"	70-330	7-35	600-3000	50-250	3.41Kgs	795mm



	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140015	3/4"	140-560	14-57	1200-5000	100-410	6.58Kgs	1130mm



	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140016	3/4"	200-800	22-82	1800-7200	140-600	7Kgs	1180mm



	Driver Square	Nm	kgf-m	lbf-in	lbf-ft	Weight	Length
12140017	1"	200-1000	22-100	1800-8850	140-740	12.8Kgs	1400mm

INDUSTRIAL MECHANICAL TORQUE WRENCH



- New mechanical torque wrenches are designed and calibrated from TAF laboratory.
- All torque wrenches are tested one by one, and have CW $\pm$ 3% accuracy.
- Quality of torque wrenches meets with ISO:6789, and follows DIN and ASME requirements.
- It is comfortable to hold the torque wrench on 2-color ergonomics handle.
- Pull the lock ring to adjust target value, and push back to lock and stop adjustment.
- All series are including: 2Nm ~ 1000Nm with fixed head or 9X12MM and 14X18MM female interchangeable heads.
- Driver head with pushing button can be applied torque with clockwise or counter-clockwise direction.

	Driver Square	Nm	Graduation	Length	Weight	Teeth
 11060211	1/4"	2-10	0.1	281mm	0.59Kgs	24T

	Driver Square	Nm	Graduation	Length	Weight	Teeth
 11060212	1/4"	4-20	0.1	322mm	0.65Kgs	24T

	Driver Square	Nm	Graduation	Length	Weight	Teeth
 11060213	3/8"	10-60	0.5	337mm	0.76Kgs	32T

	Driver Square	Nm	Graduation	Length	Weight	Teeth
 11060214	3/8"	20-100	0.5	436mm	1.32Kgs	32T

	Driver Square	Nm	Graduation	Length	Weight	Teeth
 11060215	1/2"	40-200	1.0	512mm	1.58Kgs	32T

	Driver Square	Nm	Graduation	Length	Weight	Teeth
 11060216	1/2"	60-340	2.0	614mm	1.8Kgs	32T

	Driver Square	Nm	Graduation	Length	Weight	Teeth
 11060217	3/4"	100-600	5.0	1050mm	5.03Kgs	24T



	Driver Square	Nm	Graduation	Length	Weight	Teeth
11060218	3/4"	150-800	5.0	1240mm	6.11Kgs	24T



	Driver Square	Nm	Graduation	Length	Weight	Teeth
11060219	1"	200-1000	5.0	1240mm	6.11Kgs	24T

TORQUE PROTRACTOR



	Driver Square	Weight
DG-II 12140025	1/2"x1/2"	0.59Kgs

INDUSTRIAL MECHANICAL FEMALE INTERCHANGEABLE TORQUE WRENCH



	Insert Size	Nm	Graduation	Length	Weight
11060220	9X12mm	10-60	0.5	306mm	0.63Kgs



	Insert Size	Nm	Graduation	Length	Weight
11060221	9X12mm	20-100	0.5	430mm	1.28Kgs



	Insert Size	Nm	Graduation	Length	Weight
11060222	14X18mm	20-100	0.5	430mm	1.28Kgs



	Insert Size	Nm	Graduation	Length	Weight
11060223	14X18mm	40-200	1.0	484mm	1.4Kgs



	Insert Size	Nm	Graduation	Length	Weight
11060224	14X18mm	60-340	2.0	585mm	1.6Kgs



	Insert Size	Nm	Graduation	Length	Weight
11060225	14X18mm	100-600	5.0	988mm	5.6Kgs



	Insert Size	Nm	Graduation	Length	Weight
11060226	14X18mm	150-800	5.0	1178mm	5.6Kgs