

BOLT-ON FUSE STRIPS WITH HOUSING


MEDIUM TYPE ANL FUSE

RoHS

HMDP series :

Specifications :


- Housing Material: UL-Rated 94V-0 Thermoset Plastic,
Color: Black
- Metal elements are: Brass/Copper.
(Thickness: 1.0mm & 2.0mm), Tin Plated
- Rating: 80A-500A
- Voltage rating: 32 VDC
- Interrupting Rating: 2000A @32V DC
- Ambient Temperature: - 40°C to +125°C
- Product meet RoHS
- Product not UL Listed

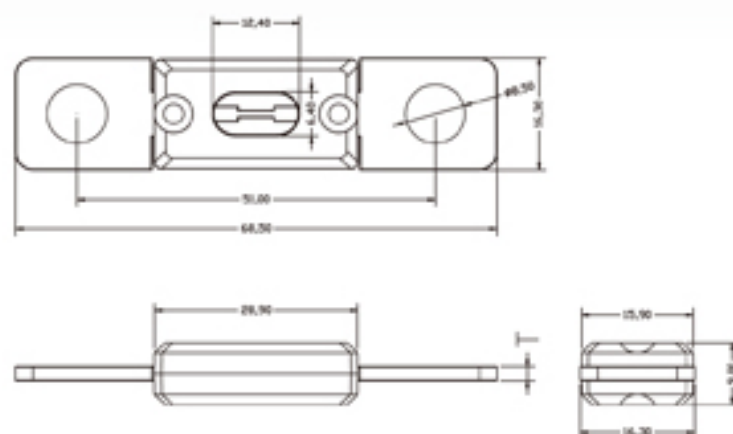

Scale : mm

Ordering Information

Part Number	Current Rating (A)	Voltage (VDC)	Thickness
HMDP-80	80	32V	T: 1.0mm
HMDP-100	100		
HMDP-125	125		
HMDP-150	150		
HMDP-175	175		
HMDP-200	200		
HMDP-225	225		
HMDP-250	250		
HMDP-300	300	32V	T: 2.0mm
HMDP-400	400		
HMDP-500	500		

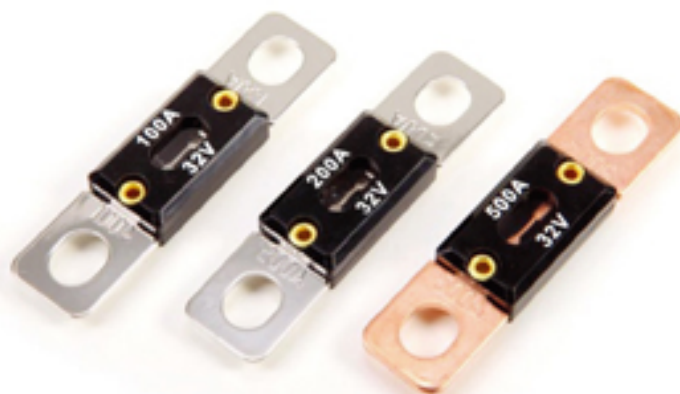

Opening Time / Pre-arcing Time :

In	1.1 In	1.35 In	2.0 In	3.0 In
80-500 A	>4Hours	<1800s	≤15s	≤5s