

## SOCKET ACCESSORY

- Made by heat-treated **Chrome Vanadium Steel** for strength exceeding international specifications.
- Professional plating prevents socket accessories from corrosion.
- Superior life-time test.

### EXTRA LONG EXTENSION BAR WITH HANDLE

Material | Chrome Vanadium Steel  
Surface | Matt Finish

| Drive<br>(inch) | Drive<br>(mm) | Wt.<br>(g) | L<br>(mm) |
|-----------------|---------------|------------|-----------|
| 3/8 (9.5mm)     | 1/2 (12.7mm)  | -          | 760       |




### SPEEDER HANDLE

MEETS OR EXCEEDS  
**A.N.S.I. DIN**  
STANDARDS STANDARDS

Material | Chrome Vanadium Steel  
Surface | Mirror / Matt / Micro Satin Finish  
Feature | Metal Handle

SPK

| Drive<br>(inch) | Wt.<br>(g) | W<br>(mm) | L<br>(mm) |
|-----------------|------------|-----------|-----------|
| 3/8 (9.5mm)     | 410        | 85        | 390       |
| 1/2 (12.7mm)    | 478        | 85        | 390       |

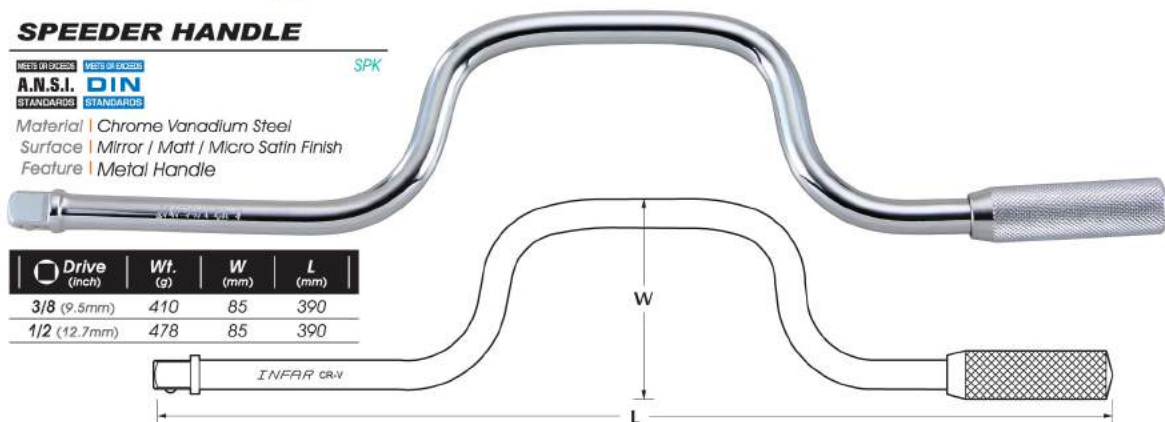

### OFFSET HANDLE

MEETS OR EXCEEDS  
**A.N.S.I. DIN**  
STANDARDS STANDARDS

Material | Chrome Vanadium Steel  
Surface | Mirror / Matt / Micro Satin Finish  
Feature | Knurling Metal Handle

LHD

| Drive<br>(inch) | Wt.<br>(g) | W<br>(mm) | L<br>(mm) |
|-----------------|------------|-----------|-----------|
| 1/2 (12.7mm)    | 1400       | 77        | 280       |
| 3/4 (19.0mm)    | 1970       | 90        | 305       |



### FOLDING CROSS WRENCH

MEETS OR EXCEEDS  
**A.N.S.I. DIN**  
STANDARDS STANDARDS

Material | Chrome Vanadium Steel  
Surface | Mirror / Matt / Micro Satin Finish  
Feature | Fits 17-19-21-23mm Sockets

XBR

| Wt.<br>(g) | L<br>(mm) |
|------------|-----------|
| 1232       | 355       |



# **SOCKET ACCESSORY**

- Made by heat-treated **Chrome Vanadium Steel** for strength exceeding international specifications.
- Professional plating prevents socket accessories from corrosion.
- Superior life-time test.


## **SPARK PLUG SOCKET**

MEETS OR EXCEEDS **A.N.S.I.** STANDARDS **DIN** STANDARDS **6 POINT** **SPK**

Material | Chrome Vanadium Steel  
Surface | Mirror / Matt / Twin / Micro Satin Finish  
Feature | 6 Point Socket  
None / Single Groove / Knurling



| Drive (inch) | Size (inch) | Wt. (g) | L (mm) | Drive (inch) | Size (mm) | Wt. (g) | L (mm) |
|--------------|-------------|---------|--------|--------------|-----------|---------|--------|
| 3/8 (9.5mm)  | 5/8         | 92      | 65     | 3/8 (9.5mm)  | 16        | 92      | 65     |
| 3/8 (9.5mm)  | 13/16       | 142     | 65     | 3/8 (9.5mm)  | 18        | -       | 65     |
| 1/2 (12.7mm) | 5/8         | 90      | 65     | 3/8 (9.5mm)  | 21        | 138     | 65     |
| 1/2 (12.7mm) | 13/16       | 142     | 65     | 1/2 (12.7mm) | 16        | 90      | 65     |
|              |             |         |        | 1/2 (12.7mm) | 21        | 138     | 65     |



## **UNIVERSAL JOINT**

MEETS OR EXCEEDS **A.N.S.I.** STANDARDS **DIN** STANDARDS **6 POINT** **SPK**

Material | Chrome Vanadium Steel  
Surface | Mirror / Matt / Micro Satin Finish  
Feature | None / Single Groove

| Drive (inch) | Wt. (g) | L (mm) |
|--------------|---------|--------|
| 1/4 (6.35mm) | 26      | 38.2   |
| 3/8 (9.5mm)  | 60      | 53.0   |
| 1/2 (12.7mm) | 154     | 78.3   |
| 3/4 (19.0mm) | 592     | 109    |



## **UNIVERSAL TYPE, MAGNETIC SPARK PLUG SOCKET**

MEETS OR EXCEEDS **A.N.S.I.** STANDARDS **DIN** STANDARDS **6 POINT** **SPK**

Material | Chrome Vanadium Steel  
Surface | Mirror / Matt / Micro Satin Finish  
Feature | 6 Point / Spline Socket  
None / Knurling

| Drive (inch) | Size (inch/mm) | Wt. (g) | L (mm) |
|--------------|----------------|---------|--------|
| 3/8 (9.5mm)  | 9/16 14        | 178     | 131    |
| 3/8 (9.5mm)  | 5/8 16         | 194     | 131    |
| 3/8 (9.5mm)  | 13/16 21       | 230     | 131    |



## **FXM ADAPTER**

MEETS OR EXCEEDS **A.N.S.I.** STANDARDS **DIN** STANDARDS **6 POINT** **SPK**

Material | Chrome Vanadium Steel  
Surface | Mirror / Matt / Micro Satin Finish

| Item No. | F/Drive (inch) | M/Drive (inch) | wt. (g) | L (mm) |
|----------|----------------|----------------|---------|--------|
| 2F3M     | 1/4 (6.35mm)   | 3/8 (9.5mm)    | -       | 26.0   |
| 3F2M     | 3/8 (9.5mm)    | 1/4 (6.35mm)   | 20      | 27.0   |
| 3F4M     | 3/8 (9.5mm)    | 1/2 (12.7mm)   | 45      | 35.0   |
| 4F3M     | 1/2 (12.7mm)   | 3/8 (9.5mm)    | 48      | 36.0   |
| 4F6M     | 1/2 (12.7mm)   | 3/4 (19.0mm)   | 140     | 48.8   |
| 6F4M     | 3/4 (19.0mm)   | 1/2 (12.7mm)   | 170     | 53.5   |
| 6F8M     | 3/4 (19.0mm)   | 1" (25.4mm)    | 390     | 62     |
| 8F6M     | 1" (25.4mm)    | 3/4 (19.0mm)   | 430     | 66     |

