


R-TYPE FLARE NUT WRENCH

- Made by heat-treated **Chrome Vanadium Steel** for strength exceeding international specifications.
- Professional plating prevents wrenches from corrosion.
- **6 point** double end flare nut wrench.
- Designed to work on a variety of fittings, such as fuel, brake, and air conditioning lines.
- **15° offset flare nut drive** helps to reduce swing obstacles and to minimize knuckle fatigue.
- Superior life-time test.



R-TYPE FLARE NUT WRENCH



RFV6

Material | Chrome Vanadium Steel
Surface | Mirror / Matt / Micro Satin / Color Electro-deposition Finish
Feature | Flat Panel
15° Offset Flare Nut Drive
6 Point Box

5x R-type Flare Nut Wrench Set

PP Rack (PAT.P.) + Label

5x SAE 1/4"x5/16", 3/8"x7/16", 1/2"x9/16", 5/8"x11/16", 3/4"x7/8"

5x MM 9x11, 10x12, 13x14, 15x17, 16x18mm

Size (inch)	Wt. (g)	L (mm)
1/4x5/16	53	135
5/16x3/8	47	145
3/8x7/16	64	155
1/2x9/16	87	175
5/8x11/16	130	200
5/8x3/4	165	210
3/4x7/8	184	225

Size (mm)	Wt. (g)	L (mm)
7x9	46	145
8x9	46	145
8x10	47	145
9x10	46	145
9x11	45	145
10x11	66	155
10x12	65	155
11x12	65	155
11x13	88	175
12x13	86	175
12x14	84	175
13x14	87	175
13x15	82	175
14x16	130	200
14x17	131	200
15x16	130	200

Size (mm)	Wt. (g)	L (mm)
15x17	127	200
16x17	130	200
16x18	165	210
17x19	165	210
18x20	186	225
19x21	186	225
19x22	184	225
20x22	189	225




15° offset flare nut drive for knuckle clearance.

R-TYPE FLEXIBLE FLARE NUT WRENCH

- Made by heat-treated **Chrome Vanadium Steel** for strength exceeding international specifications.
- Professional plating prevents wrenches from corrosion.
- **6 point** double end flare nut wrench.
- Designed to work on a variety of fittings, such as fuel, brake, and air conditioning lines.
- **Flexible head** tilts 180° at any interval with continuous head tension.
- Superior life-time test.



Flexible head tilts 180° at any interval with continuous head tension.

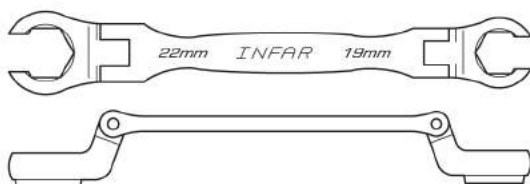

R-TYPE FLEXIBLE FLARE NUT WRENCH

MEETS OR EXCEEDS
A.N.S.I.
STANDARDS



DFXRPV

Material | Chrome Vanadium Steel
Surface | Mirror / Matt / Micro Satin Finish
Feature | Flat Panel
180° Flexible Flare Nut Drive
6 Point Box

Size (inch)	Wt. (g)	L (mm)	Size (mm)	Wt. (g)	L (mm)
3/8x7/16	74	152	10x11	74	152
1/2x9/16	116	168	12x13	116	168
5/8x11/16	206	212	14x17	206	212
3/4x7/8	314	233	19x22	314	233

A-TYPE FLARE NUT WRENCH

- Made by heat-treated **Chrome Vanadium Steel** for strength exceeding international specifications.
- Professional plating prevents wrenches from corrosion.
- **6 point** double end flare nut wrench.
- Designed to work on a variety of fittings, such as fuel, brake, and air conditioning lines.
- **15° offset flare nut drive** helps to reduce swing obstacles and to minimize knuckle fatigue.
- Superior life-time test.



A-TYPE FLARE NUT WRENCH



FV6

Material | Chrome Vanadium Steel
Surface | Matt Finish
Feature | Raised Panel
15° Offset Flare Nut Drive
6 Point Box

Size (inch)	Wt. (g)	L (mm)	Size (mm)	Wt. (g)	L (mm)
1/4x5/16	37	135	6x8	38	135
3/8x7/16	64	154	8x9	37	135
1/2x9/16	97	174	8x10	36	135
5/8x11/16	133	199	9x10	35	135
3/4x7/8	193	224	9x11	64	154
			10x11	65	154
			10x12	66	154
			11x12	62	154
			12x13	97	174
			12x14	93	174
			13x14	96	174
			14x17	134	199
			15x17	133	199
			16x18	130	199
			19x21	190	224
			19x22	190	224
			20x22	186	224



15° offset flare nut drive
for knuckle clearance.

H-TYPE FLARE NUT WRENCH

- Made by heat-treated **Chrome Vanadium Steel** for strength exceeding international specifications.
- Professional plating prevents wrenches from corrosion.
- **6/12 point** double end flare nut wrench.
- Designed to work on a variety of fittings, such as fuel, brake, and air conditioning lines.
- **13° offset flare nut drive** helps to reduce swing obstacles and to minimize knuckle fatigue.
- Superior life-time test.



13° offset flare nut drive for knuckle clearance.

GERMAN-TYPE FLARE NUT WRENCH



GFV6/GFV

Material | Chrome Vanadium Steel


Surface | Mirror / Matt / Micro Satin / Color Electro-deposition Finish

Feature | Meets or Exceeds DIN3118 Standards

Sunk / Panel Panel

13° Offset Flare Nut Drive

6 Point(GFV6) / 12 Point(GFV) Box

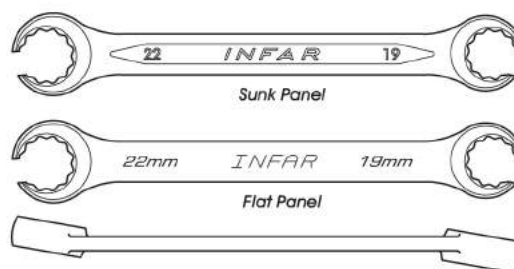

Size (inch)	Wt. (g)	L (mm)
1/4x5/16	42	139
5/16x3/8	42	139
3/8x7/16	56	153
7/16x1/2	82	174
1/2x9/16	74	174
9/16x5/8	145	195
5/8x11/16	145	195
11/16x3/4	183	213
3/4x7/8	230	228
7/8x15/16	320	243
15/16x1"	415	258
1"x1-1/8	595	297
1-1/8x1-1/4	595	297

Size (mm)	Wt. (g)	L (mm)
7x9	42	139
8x9	44	139
8x10	41	139
9x10	42	139
9x11	57	153
10x11	57	153
10x12	56	153
11x12	56	153
11x13	82	174
12x13	81	174
12x14	77	174
13x14	79	174
13x15	96	175
14x15	94	175
14x17	142	195
15x17	139	195

Size (mm)	Wt. (g)	L (mm)
16x18	187	213
17x19	182	213
18x19	184	213
19x21	230	228
19x22	230	228
21x23	330	243
22x24	320	243
24x26	415	258
24x27	415	258
24x32	-	287
25x28	595	297
30x32	595	297
36x41	1020	317