

YJ-208

Auto Air Conditioner Fuse




Plug-in style fuse, replace GM,

Thermal, Limited no. 6551258, supercede GM#6556440

Standard packing: 100pc/inner box, 1000pc/14kg/16kg/1.96'

YJ-209

Cartridge Fuse Links For German Motor

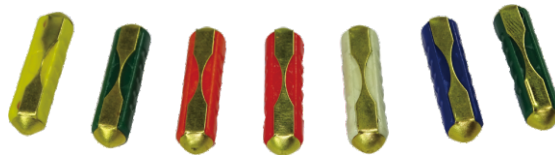

YJ-209M



YJ-209PB100



➤ Voltage rating: 32 Volts

➤ Material: Spring brass or copper

➤ Insulating Body: Bakelite

➤ Re-arcing time at: $1.5 \cdot I_N \leq 1\text{Hr}$, $2.5 \cdot I_N \leq 1\text{Min}$

PART NUMBERING SYSTEM

Series	Packing	Rating
YJ-209	☐	- ☐ A
	Blank - 1000pc in a polybag B100 - 100pc in a plastic box PB100 - 100pc in a color box C10 - 10pc in a blister card C20 - 20pc in a blister card M - 20pc in capsule pack	05 - 5 amp (Yellow) 08 - 8 amp (White) 10 - 10 amp (Green) 15 - 15 amp (Lt. Yellow) 16 - 16 amp (Red) 20 - 20 amp (Ivory) 25 - 25 amp (Blue) 30 - 30 amp (Green with copper) 40 - 40 amp (Black with copper)

YJ-210 Auto Plug-in Fuse



YJ-210



YJ-210N



YJ-210M



YJ-210M2

- Voltage rating: 32 Volts
- Structure: Zinc alloy
- Test specification : Rating Blow Time

10%	>=100Hr
135%	>=0.75s, <=1800s
200%	>=0.15s, <=5s
350%	<=0.08s

PART NUMBERING SYSTEM

Series	Type	Marking	Packing	Rating
YJ-210	☐	☐	☐	- ☐ A
	Blank – Plug-in type Fuse N – Mini Plug-in type Fuse M – Low Profile mini fuse (Micro) M2 – Micro II Fuse	Blank – standard amperage marking I – Amperage rating ink printing on the cover	Blank – 1000pc in a polybag B5 – 5pc in a plastic box, 20 plastic boxes in a paper box B50 – 50pc in a plastic box B100 – 100pc in a plastic box PB100 – 100pc in a paper box C5 – 5pc on a blister card C5R – 5pc on a blister card (circular array) C6 – 6pc on a blister card C10 – 10pc on a blister card DB10 – 10pc on a double blister card	01 – 1 amp (Black) 02 – 2 amp (Grey) 03 – 3 amp (Violet) 04 – 4 amp (Pink) 05 – 5 amp (Tan) 07.5 – 7.5 amp (Brown) 10 – 10 amp (Red) 15 – 15 amp (Blue) 20 – 20 amp (Yellow) 25 – 25 amp (Clear) 30 – 30 amp (Green) 35 – 35 amp (Purple) 40 – 40 amp (Dark Orange)

YJ-210

Auto Plug-in Fuse

YJ-210B5



YJ-210NB5



YJ-210MB5



YJ-210PB100



YJ-210B100



YJ-210B50



YJ-210C5



YJ-210NC5



YJ-210C10



YJ-210NC10



YJ-212 Maxi Plug-in Fuse

- Voltage rating: 32 Volts
- Structure: Zinc alloy
- Test specification: Rating Blow Time

110%	>=100Hr
135%	>=0.75s, <=1800s
200%	>=0.15s, <=5s
350%	<=0.08s



YJ-212B20



YJ-212C1



PART NUMBERING SYSTEM

Series	Body	Marking	Packing	Rating
YJ-212	☐	☐	☐	- ☐ A
	Blank – standard PC material 2 – nylon material	Blank – standard amperage marking I – Amperage rating ink printing on the cover	Blank – 100pc in a polybag PB100 – 100pc in a plastic bag, then in a paper box B20 – 20pc in a plastic box C1 – 1pc on a blister card DB1 – 1pc on a double blister card	020 – 20 amp (Yellow) 030 – 30 amp (Green) 035 – 35 amp (Lt Red) 040 – 40 amp (Orange) 050 – 50 amp (Red) 060 – 60 amp (Blue) 070 – 70 amp (Tan) 080 – 80 amp (White) 100 – 100 amp (Violet)

YJ-213 Auto Glass Fuse

- Voltage rating: 125V
- Body: Glass tube, Flat metal: Zinc alloy
- Test specification: Rating Blow Time

110%	>=4Hr
135%	<=1Hr
200%	<=10s



YJ-213C10



YJ-213B5



YJ-213B100



YJ-213PB100



PART NUMBERING SYSTEM

Series	Cap	Packing	Rating	Dimensions
YJ-107	☐	☐	- ☐ A	- ☐ ☐ V
	Blank – metal cap D – copper cap E – external soldered cap	Blank – 100pc in a polybag B5 – 5pc in an inner box, 20 inner boxes in a paper box B100 – 100pc in a plastic box PB100 – 100pc in a paper box C10 – 10pc on a blister card	01 – 1 amp 15 – 15 amp 02 – 2 amp 20 – 20 amp 03 – 3 amp 25 – 25 amp 04 – 4 amp 30 – 30 amp 05 – 5 amp 35 – 35 amp 07.5 – 7.5 amp 40 – 40 amp 09 – 9 amp 50 – 50 amp 10 – 10 amp 14 – 14 amp	Code available amp Dimensions 2AG 7.5A, 9A 1/4"X7/8"(6.35diaX22mm) 3AG 1A to 50A 1/4"X1-1/4"(6.35diaX31.75mm) 8AG 5A to 30A 1/4"X1"(6.35diaX25mm) SFE14 14A 1/4"X1-1/16"(6.35diaX27mm) 9AG 0A, 50A 1/4"X1-7/16"(6.35diaX36mm)

YJ-214 Auto Glass Fuse



- Voltage rating: 125V/250V
- Caps: Cylindrical iron, both nickel and gold finish are available
- Body: Glass tube, Flat metal: Zinc alloy
- Dimension: 10.3diaX38mm
- Amperage rating: 0.5A to 80A
- Industry packing: 100pc/polybag, 2,000pc/18kg/20kg/1.2'
- Part number system: YJ-214- ☐ A for nickel plated cap
YJ-214G- ☐ A for gold plated cap

➤ Test specification: Rating	Amp	Blow Time
110%	35A-60A	>=4Hr
110%	0.5A-30A	>=4Hr
135%	0.5A-30Ar	<=1Hr
200%	0.5A-8A	<=5s
200%	10A-30A	<=10s
300%	35A-60A	<=4s

YJ-215 Auto Glass Fuse



- Body: Glass tube, Flat metal: Zinc alloy
- Dimension: 5.0diaX20mm
- Industry packing: 1,000pc/polybag, 20,000pc/10kg/12kg/0.82'
- Part number system: YJ-215 - ☐ A

YJ-221 Fuse Link



YJ-221MF



YJ-221MMF



YJ-221F



YJ-221SF



YJ-221SFM



YJ-221M



YJ-221MY



YJ-221MMY



YJ-221L




YJ-221SL

YJ-221 Fuse Link



YJ-221P



YJ-221NP

- Voltage rating: 32Volts
- Color code for P type
 - 45A Red 65A Black 75A Grey
- Color code for NP type
 - 25A Brown 30A Green 40A Lt Green 50A Red
 - 60A Yellow 70A Lt Brown 80A Black 100A Blue
- Color code for other types
 - 20A White 30A Pink 40A Green 50A Red
 - 60A Yellow 70A Brown 80A Black 100A Blue
 - 120A Grey

PART NUMBERING SYSTEM

Series	Type	Rating
YJ-221		- A
	F – Female type SF – Female type with deeply pitch SFM – Female type, shaped cover M – Male type L – Male type with bent terminal SL – Male type with shorter bent terminal MY – Male type with open terminal MMY – Male type with open terminal, shaped cover MF – Mini female type MMF – Mini female type with straight body P – Maxi Hook Type NP – Mini Hook Type	025 – 25 amp (only available for NP type) 030 – 30 amp 040 – 40 amp 045 – 45 amp (only available for P type) 050 – 50 amp 060 – 60 amp 065 – 65 amp (only available for P type) 070 – 70 amp 075 – 75 amp (only available for P type) 080 – 80 amp 100 – 100 amp 120 – 120 amp (not available for MF, P, NP type)

YJ-229 Honda Flat Fuse

- Structure: Zinc alloy
- Voltage rating: 125V/250V
- Applied for 6.35*25mm
- Amperage Rating: 45A/55A/65A

Test specification: Rating	Blow Time
110%	>=4 Hr
135%	<=1 Hr
200%	<=2 Min



YJ-237 ANL Fuse

- Fast Acting Type
- High Performance Good For High Power Audio Systems Also Use
Lift-truck And Other Battery Operated System
- Visible Through Mica Window



YJ-237



YJ-237W



YJ-237M



YJ-237SU



YJ-237S

PART NUMBERING SYSTEM

Series	Type	Marking	Rating
YJ-237	☐	☐	- ☐ A
	Blank – ANL type with bakelite body W – ANL type with ceramic body M – Mega type with PBT body S – Midi type with PBT body SU – Miditype with PBT body, open terminal end	Blank – terminal in standard plating G – terminal with gold plating	35 amp – 500 amp