

AES-1117-12

Starter Button Switch
Merit no. 201000
Use for Datsun 120Y, 160J.

**AES-1117-13**

Starter Button Switch
Same as AES-1117-12
with Rubber Cover
Use for Datsun B-310

**AES-1117-22**

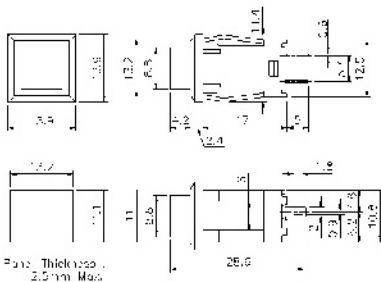
Push Button Switch
125V, 3A, 50 Ohms Max.
DC 500V, 100Ohms 1 min.
AC 1000V, 1 min.
Color: Red, Black and White

**AES-1117-38**

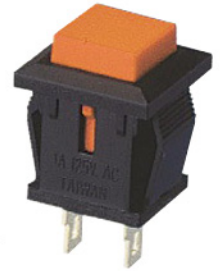
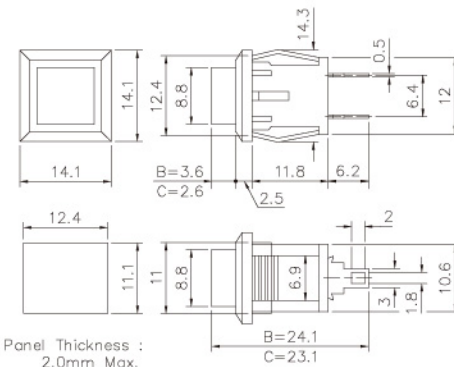
PUSH BUTTON SWITCH
RATING: 10AMPS 125AC;
6AMPS 250V AC
2P, SPST, OFF-(ON)
MEET IP65

**AES-1118-67A**

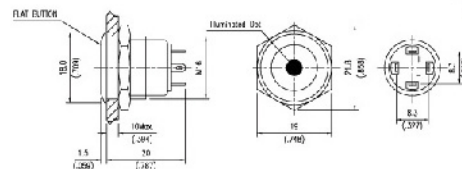
Miniature Push-Button Switch
125V AC 1Amps.
Cap color: Blue, Black, Green, White or Yellow.

**AES-1118-67B/67C**

Miniature Push-Button Switch
12V AC 1 Amps.
AES-1118-67B: Normal Open
AES-1118-67C: Normal Closed
Cap color: Blue, Black, Green, White or Yellow.

**AES-1117-39**

Illuminated Push Button



AES-1117-15

Pollak # 24-360
Standard # SSB-5
Valley Forge # PB-1
General # 4200

Heavy Duty Push Button Switch
SPST. Mounting diameter 16mm.
Rating: 12VDC, 60Amps
24VDC, 40Amps
Supplied with Neoprene Boot.
Die-casting Construction with Silver Contacts.
1996097, SW-1163, D3HZ-11500A



AES-1117-15N

AES-1117-15 with Protection Collar.



AES-1117-15C

Heavy Duty
Push Button Switch
Same as AES-1117-15,
except with 2 studs.



AES-1117-18

Cole Hersee # 90030

Heavy Duty Type,
Plastic Push Button,
Rubber Cap
and Mounting Nut.



AES-1117-19

Cole Hersee # 90011
Pollak # 24-359



AES-1117-19A

Heavy Duty
Type with Chrome
Push Button
and Face Nut
Same as item AES-1117-19
Except with plastic nut.



AES-1117-35

Cole Hersee # 9216-03

Push Button Switch
2 Screw terminals. Mounting Stem:
5/8"-32 thread, 21/32" long.
With screw-on black rubber
protective cap.



AES-1117-37

PUSH BUTTON SWITCH
12VDC 60AMPS



AES-1117-17

Cole Hersee # M-608
General # 3936

Plastic Dipped Moisture-Proof
Push Button Starter & Horn Switch.
Supplier With a Special
Moisture-Proof
and Dust-Proof Rubber Cap.
Insulated Type
Push-Button Starter and Horn Switch.



AES-1117-14

General # 2876

Universal Starter Switch
Rating: 25 Amps @6 Volts 15 Amps
@12 Volts.
Insulated, Two Screw Terminals,
Mounts Through 5/8" Hole
Chrys. 903437, 1237123, K-F700502,
IHC 80949-R1, AL-XA-456E, 153766R91



AES-1117-31

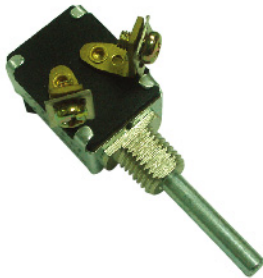
Pull Switch
1 screw terminal

**AES-1117-32**

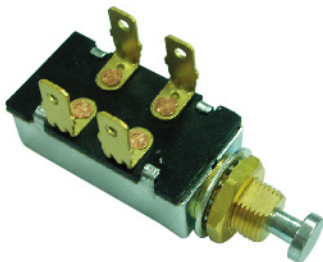
Pull Switch
2 screw terminals

**AES-1117-33**

Pull Switch
12VDC 10Amps
2 screw terminals
Thread: 7/16-28

**AES-1117-34**

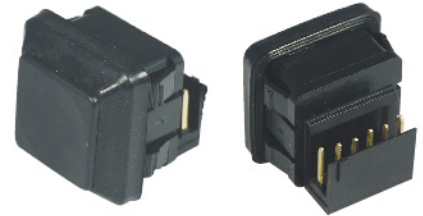

Cole Hersee # 91801
Momentary Switch 12VDC 10Amps
Off with plunger depressed,
spring return to ON.
For energizing 2 circuits
simultaneously.
Popular for use in school
bus stepwell and door control.
4 blade terminals.

**AES-1117-36**

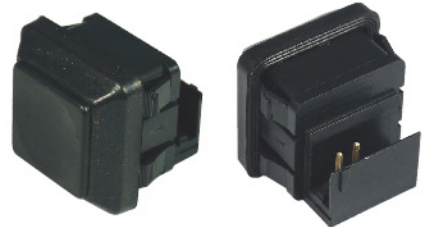

ENGINE START SWITCH
RATING: 50A, 12VDC
3P, SPST, OFF (ON)
TERMINAL: SC M4
COLOR: RED LED/RED LENS

**AES-1511-17**

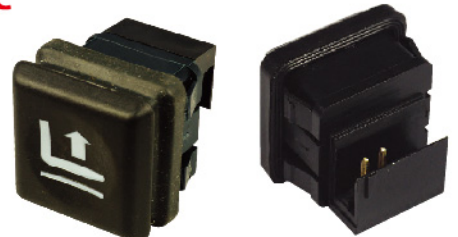

Push Button Switch
6 Pins (1,2,3,4,5,6)
0054282

**AES-1511-18**

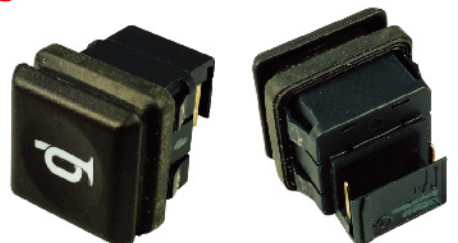

Push Button Switch
2 Pins (2,3)
0090892

**AES-1511-18-C**

Push Button Switch
2 Pins (2,3)
Printing Symbol: Raise

**AES-1511-19-C**

Push Button Switch
2 Pins (1,6)
Printing Symbol: Horn

**AES-1511-19-CR**

Push Button Switch
2 Pins (1,6)

