


HP602 HP1002 60 TON / 100 TON 電動油壓床 AUTOMATIC HYDRAULIC PRESS

- (1) 工作台可依工作物件的大小,上、下自由調整工作距離。
- (2) 適用於各種機件彎曲變形、校正、整塑,或軸承、齒輪軸心壓入或逼出等功用。
- (3) 適用於一般大型車輛、輪船或鋼鐵工業、農業機械、礦工機械等,是大型工件製造、維修最好的幫手。
- (4) 配有雙速、高低壓,操作快速方便,並設有壓力安全閥,當壓力超壓時,會自動洩壓,操作安全、方便快速。

Feature

- (1) Work table can freely adjust working distance (up-down) as per the size of work piece.
- (2) Suitable to be applied for such functions as bending, deforming, rectifying, modeling or for bearing and gear shaft arbor getting pressed in or enforcing out.
- (3) Suitable for large-sized vehicles, ships, or steel / iron industries, agricultural machinery, miner machinery, etc. Best helper to the production and repair of work piece of big size.
- (4) Electric hydraulic press is equipped with dual-speed high/low pressure: The operation is quick and convenient. Also, pressure safety valve is also equipped. When pressure exceeds what it is supposed to be, it will release pressure automatically. The operation is quite safe, quick and convenient.

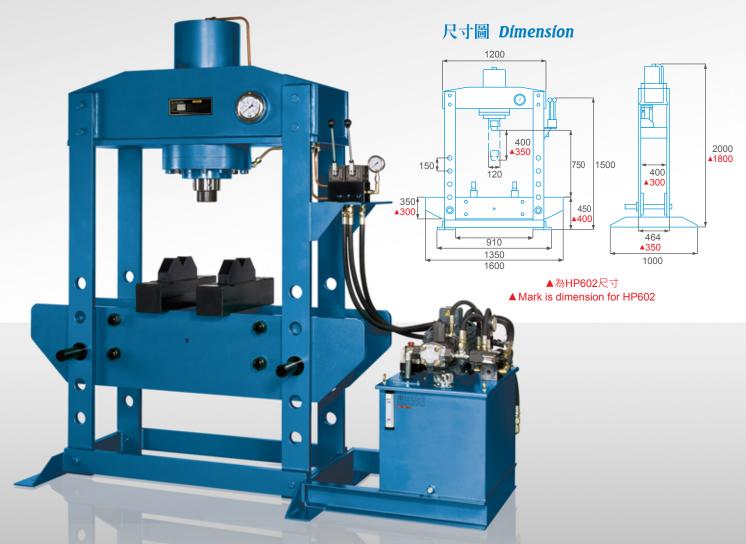

型號 Model	出力 Capacity	油壓缸內徑 Cylinder Bore	輸入壓力 Pressure	油壓缸行程 Cylinder Stroke	包裝方式 Packing	淨重 N.W.	毛重 G.W.	材積 CUFT
HP602	60 TON	¢200 mm	220 kg/cm ²	350 mm	外銷:板條箱 Wooden Crate	956.0 kgs	1076.0 kgs	174'
HP1002	100 TON	¢250 mm		400 mm		1386.0 kgs	1550.0 kgs	200'


HP1502 150 TON 電動油壓床 AUTOMATIC HYDRAULIC PRESS

特點

- (1) 工作台可依工作物件的大小,上、下自由調整工作距離。
- (2) 適用於各種機件彎曲變形、校正、整塑,或軸承、齒輪軸心壓入或逼出等功用。
- (3) 適用於一般大型車輛、輪船或鋼鐵工業、農業機械、礦工機械等,是大型工件製造、維修最好的幫手。
- (4) 電動油壓床配有雙速、高低壓,操作快速方便,並設有壓力安全閥,當壓力超壓時,會自動洩壓,操作安全、方便快速。
- (5) 工作台使用油壓缸調整上下高度,簡化操作難度。

Feature

- (1) Work table can freely adjust working distance (up-down) as per the size of work piece.
- (2) Suitable to be applied for such functions as bending, deforming, rectifying, modeling or for bearing and gear shaft arbor getting pressed in or enforcing out.
- (3) Suitable for large-sized vehicles, ships, or steel / iron industries, agricultural machinery, miner machinery, etc. Best helper to the production and repair of work piece of big size.
- (4) Electric hydraulic press is equipped with dual-speed high/low pressure: The operation is quick and convenient. Also, pressure safety valve is also equipped. When pressure exceeds what it is supposed to be, it will release pressure automatically. The operation is quite safe, quick and convenient.
- (5) Working bench adjust height by oil cylinder, it can simplify difficulty of operation.

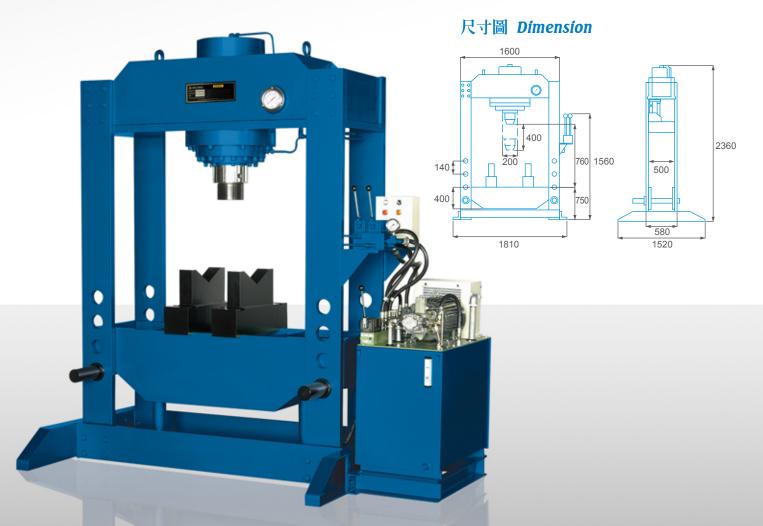

型號 Model	出力 Capacity	油壓缸內徑 Cylinder Bore		油壓缸行程 Cylinder Stroke		淨重 N.W.	毛重 G.W.	材積 CUFT
HP1502	150 TON	¢300 mm	220 kg/cm ²	400 mm	外銷:板條箱 Wooden Crate	3200.0 kgs	3280.0 kgs	200'