



TS-7061(V)(VC)
Air Random Orbital Sander With 5"/6" Pad (10,000 Rpm)



TS-7062(V)
Composite Air Random Orbital Sander With 3"/5"/6" Pad (10,000 Rpm)



TS-7063(V)(VC)
Composite Air Random Orbital Sander With 5"/6" Pad (10,000 Rpm)



TS-7023(V)(VC)
Air Random Orbital Sander With 5"/6" Pad(10,000 Rpm) Orbit Dia.:10.0 mm



TS-7728(V)(VC)
Air Random Orbital Sander With 5"/6" Pad (10,000 Rpm) Orbit Dia.:7.0 mm



TS-7937(V)
Air Random Orbital Sander With 5"/6" Pad(10,000 Rpm) Orbit Dia.:7.0 mm




TS-7746
Air Random Orbital Sander With 3"/5" Pad (11,000Rpm)




TS-7021
Gear Driven Air Sander With 5"/6" Pad (2,700 Rpm)



TS-7111(V)
Air Jittbug Orbital Sander (73X91mm) (9,000Rpm)



TS-7025(V)
Professional Air Jitterbug Orbital Sander (176 X 93 mm)

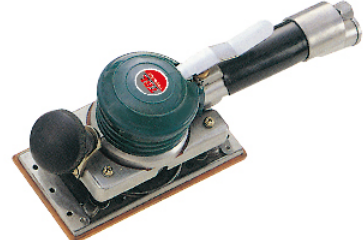

TS-7026(V)
Professional Air Jitterbug Orbital Sander (176 X 93 mm)



Specification (at 90 Psi)

Model No.	Orbit Diameter		Spindle Thread	Free Speed (Rpm)	Overall Length		Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg.Air Consumption		Net Weight	
	inch	mm			inch	mm			Cfm	L/Min.	Kgs	Lbs
TS-7021	—	—	5/16"-24	2,700	8-9/10"	225	1/4"	3/8"	6	170	1.55	3.42
TS-7023	2/5"	10	5/16"-24	10,000	8-7/10"	220	1/4"	3/8"	6	170	1.6	3.5
TS-7025	3/16"	5		7,000	8-3/10"	210	1/4"	3/8"	6	170	1.95	4.3
TS-7026	3/16"	5		7,000	11-2/5"	290	1/4"	3/8"	6	170	2.24	4.93
TS-7061	3/8"	5	5/16"-24	10,000	6"	152	1/4"	3/8"	5	142	0.7	1.5
TS-7062	3/16"	5	5/16"-24	10,000	6"	152	1/4"	3/8"	4	113	0.7	1.5
TS-7063	3/16"	5	5/16"-24	10,000	10"	155	1/4"	3/8"	6	170	0.85	2.0
TS-7111	1/8"	3		9,000	4"	100	1/4"	3/8"	5	142	0.85	1.87
TS-7728	3/10"	7	5/16"-24	10,000	10"	250	1/4"	3/8"	6	170	1.95	4.3
TS-7746	1/2"	14	5/16"-24	11,000	8-7/10"	220	1/4"	3/8"	3	85	1.03	2.27
TS-7937	3/10"	7	5/16"-24	10,000	10"	250	1/4"	3/8"	6	170	1.1	2.42

※TS-7XXXV:Self Vacuum Type, TS-7XXXVC:With Central Vacuum Type





TS-7000
Air Belt Sander
(13X610mm)



TS-7008
Air Belt Sander
(13 X 610 mm)



TS-7009
Air Belt Sander
(10 X 330 mm)



TS-7010
Air Belt Sander (20X520mm)
TS-7010P
(Rubber Pulley)
Air Belt Sander (20X520mm)



TS-7702
Heavy Duty Air Belt
Sander(6x330mm)



TS-7703
Heavy Duty Air Belt
Sander(10x330mm)



TS-7704/TS-7706
Air Belt Sander (12X610mm)
Air Belt Sander (12X457mm)



TS-7705
Air Belt Sander (20X520mm)
TS-7705P
(Rubber Pulley)
Air Belt Sander (20X520mm)



TS-7771
Angle Belt Sander
(10X330mm)



TS-7719
Air Belt Sander
(50X235mm)



TS-7713
Air Belt Sander With Coated
Abrasive Sheets(20x520mm)



TS-7001
Air Belt Sander With Coated
Abrasive Sheets(30x540mm)

Specification

(at 90 Psi)

Model No.	Sanding Pad		Free Speed (Rpm)	Overall Length		Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight	
	inch	mm		inch	mm			Cfm	L/Min.	Kgs	Lbs
TS-7000	1/2"x24"	13x610	20,000	18-1/2"	470	1/4"	3/8"	4	113	0.8	1.76
TS-7001	1-1/5"x21-1/4"	30X540	13,000	15-7/20"	390	1/4"	3/8"	8	226	2.1	4.62
TS-7008	1/2"x24"	13x610	16,000	13-4/5"	350	1/4"	3/8"	6	170	1.1	2.42
TS-7009	3/8"x13"	10X330	16,000	11"	280	1/4"	3/8"	6	170	0.8	1.76
TS-7010 (P)	7/8"x20"	20X520	16,000	13-1/5"	335	1/4"	3/8"	7	198	1.14	2.5
TS-7702	1/4"x13"	6X330	16,000	19-3/10"	490	1/4"	3/8"	5	140	0.77	1.7
TS-7703	2/5"x13"	10X330	16,000	19-3/10"	490	1/4"	3/8"	5	140	0.77	1.7
TS-7704	1/2"x24"	12x610	16,000	18-1/2"	470	1/4"	3/8"	5	140	0.74	2.2
TS-7705(P)	7/8"x20"	20x520	16,000	15-3/5"	395	1/4"	3/8"	4	113	1.0	3.1
TS-7706	1/2"x18"	12x457	16,000	16"	410	1/4"	3/8"	5	140	1.4	2.2
TS-7713	7/8"x20"	20X520	18,000	14-4/5"	375	1/4"	3/8"	7	198	1.3	2.86
TS-7719	2"x9-1/4"	50x235	8,500	8-3/8"	229	1/4"	3/8"	3	85	0.85	1.63
TS-7771	3/8"x13"	10x330	20,000	7-3/5"	194	1/4"	3/8"	4	113	1.0	1.87



Non-Vacuum Type



Self-Generated Vacuum Type



Central Vacuum Type

10,000/12,000Rpm 5.0(3/16") Orbit LP Random Orbital Sander Specifications

Specification

Non-Vacuum Models

Model No.	Description	Length	Weight	Height	Sound Level
		In. / MM	Lbs / Kgs	In. / Mm	DbA
TS-7060-3	3" Vinyl / Hook Face Pad	5.23 / 135.4	1.72 / 0.78	3.34 / 84.8	81
TS-7060-5	5" Vinyl / Hook Face Pad	6.0 / 153.6	1.78 / 0.81	3.45 / 87.6	81
TS-7060-6	6" Vinyl / Hook Face Pad	6.56 / 166.3	1.87 / 0.85	3.45 / 87.6	81

Self-Generated Vacuum Models

Model No.	Description	Length	Weight	Height	Sound Level
		In. / MM	Lbs / Kgs	In. / Mm	DbA
TS-7060V-3	3" Vinyl / Hook Face Pad	7.49 / 190.2	1.85 / 0.84	3.34 / 84.8	88
TS-7060V-5	5" Vinyl / Hook Face Pad	8.2 / 208.4	1.96 / 0.89	3.45 / 87.6	88
TS-7060V-6	6" Vinyl / Hook Face Pad	8.7 / 221.1	2.07 / 0.94	3.45 / 87.6	88

Central Vacuum Models

Model No.	Description	Length	Weight	Height	Sound Level
		In. / MM	Lbs / Kgs	In. / Mm	DbA
TS-7060VC-3	3" Vinyl / Hook Face Pad	6.88 / 174.8	1.8 / 0.82	3.34 / 84.8	81
TS-7060VC-5	5" Vinyl / Hook Face Pad	7.62 / 193.6	1.92 / 0.87	3.45 / 87.6	81
TS-7060VC-6	6" Vinyl / Hook Face Pad	8.12 / 206.3	2.0 / 0.91	3.45 / 87.6	81

General Specification For All Models

Rpm	Air Flow Scfm/Lpm	Power Hp/Watt	Air Pressure Psi/Bar	Air Inlet Pt/Npt	Recommended Hose Size ID
10,000 / 12,000	16 / 453	0.24 / 179	90 / 6.3	1/4"	1/4" / 6.0 mm

*For 2.5mm(3/32") Orbit Model No.:TS-7XXX-XES

*For 12,000Rpm Model No.:TS-7600-X-1

HEAVY DUTY AIR RANDOM ORBITAL SANDER



TS-7065
H/D Random Orbital Sander



TS-7050F
H/D Oil Free Random Orbital Sander



TS-7051
H/D Jitterbug Sander(100X110mm)

Specification (at 90 Psi - 6.3 bar)

Model No.	Sanding Pad		Free Speed (Rpm)	Orbit Diameter		Vacuum Type	Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight		Packing Pcs/Ctn/G.w/Cuft
	inch	mm		mm	inch				Cfm	L/Min.	Kgs	Lbs	
TS-7065-3H(V)-1	3"	75	12,000	2.5(3/32")		Non	1/4"	3/8"	6	170	0.79	1.74	12Pcs/12/2.3'
TS-7065-3H(V)	3"	75	12,000	5.0(3/16")		Non	1/4"	3/8"	6	170	0.81	1.78	12Pcs/12/2.38'
TS-7065-30H(V)	3"	75	12,000	9.5(3/8")		Non	1/4"	3/8"	6	170	0.84	1.85	12Pcs/13/2.3'
TS-7065-5H(V)-1	5"	125	12,000	2.5(3/32")		Non	1/4"	3/8"	6	170	0.82	1.86	12Pcs/13/2.3'
TS-7065-5H(V)	5"	125	12,000	5.0(3/16")		Non	1/4"	3/8"	6	170	0.84	1.85	12Pcs/13/2.3'
TS-7065-50H(V)	5"	125	12,000	9.5(3/8")		Non	1/4"	3/8"	6	170	0.89	1.96	12Pcs/14/2.3'
TS-7065-6H(V)-1	6"	150	12,000	2.5(3/32")		Non	1/4"	3/8"	6	170	0.86	1.89	12Pcs/14/2.3'
TS-7065-6H(V)	6"	150	12,000	5.0(3/16")		Non	1/4"	3/8"	6	170	0.89	1.96	12Pcs/14/2.3'
TS-7065-60H(V)	6"	150	12,000	9.5(3/8")		Non	1/4"	3/8"	6	170	0.93	2.05	12Pcs/14/2.3'
TS-7065V-3H(V)-1	3"	75	12,000	2.5(3/32")		Self-Generated Vac.	1/4"	3/8"	6	170	0.7	1.54	12Pcs/12/2.3'
TS-7065V-3H(V)	3"	75	12,000	5.0(3/16")		Self-Generated Vac.	1/4"	3/8"	6	170	0.72	1.59	12Pcs/12/2.38'
TS-7065V-5H(V)-1	5"	125	12,000	2.5(3/32")		Self-Generated Vac.	1/4"	3/8"	6	170	0.89	1.96	12Pcs/13/2.3'
TS-7065V-5H(V)	5"	125	12,000	5.0(3/16")		Self-Generated Vac.	1/4"	3/8"	6	170	0.91	2	12Pcs/14/2.3'
TS-7065V-50H(V)	5"	125	12,000	9.5(3/8")		Self-Generated Vac.	1/4"	3/8"	6	170	0.95	2.09	12Pcs/15/2.3'
TS-7065V-6H(V)-1	6"	150	12,000	2.5(3/32")		Self-Generated Vac.	1/4"	3/8"	6	170	0.92	2.03	12Pcs/15/2.3'
TS-7065V-6H(V)	6"	150	12,000	5.0(3/16")		Self-Generated Vac.	1/4"	3/8"	6	170	0.96	2.1	12Pcs/15/2.3'
TS-7065V-60H(V)	6"	150	12,000	9.5(3/8")		Self-Generated Vac.	1/4"	3/8"	6	170	1	2.2	12Pcs/15/2.3'
TS-7065VC-3H(V)-1	3"	75	12,000	2.5(3/32")		Central-Vacuum	1/4"	3/8"	6	170	0.7	1.54	12Pcs/12/2.3'
TS-7065VC-3H(V)	3"	75	12,000	5.0(3/16")		Central-Vacuum	1/4"	3/8"	6	170	0.72	1.59	12Pcs/13/2.3'
TS-7065VC-5H(V)-1	3"	75	12,000	2.5(3/32")		Central-Vacuum	1/4"	3/8"	6	170	0.89	1.96	12Pcs/14/2.3'
TS-7065VC-5H(V)	5"	125	12,000	5.0(3/16")		Central-Vacuum	1/4"	3/8"	6	170	0.94	2.07	12Pcs/14/2.3'
TS-7065VC-50H(V)	5"	125	12,000	9.5(3/8")		Central-Vacuum	1/4"	3/8"	6	170	0.95	2.09	12Pcs/14/2.3'
TS-7065VC-6H(V)-1	6"	150	12,000	2.5(3/32")		Central-Vacuum	1/4"	3/8"	6	170	0.92	2.09	12Pcs/14/2.3'
TS-7065VC-6H(V)	6"	150	12,000	5.0(3/16")		Central-Vacuum	1/4"	3/8"	6	170	0.96	2.11	12Pcs/14/2.3'
TS-7065VC-60H(V)	6"	150	12,000	9.5(3/8")		Central-Vacuum	1/4"	3/8"	6	170	1	2.2	12Pcs/15/2.3'

Oil Free Random Orbital Sander

Model No.	Sanding Pad		Free Speed (Rpm)	Orbit Diameter		Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight		Packing Pcs/Ctn/G.w/Cuft
	inch	mm		mm	inch			Cfm	L/Min.	Kgs	Lbs	
TS-7050NF(V)(VC)-3H(V)-1	3"	75	12,000	2.5(3/32")		1/4"	3/8"	6	170	0.69	1.52	12Pcs/10/2.3'
TS-7050NF(V)(VC)-3H(V)	3"	75	12,000	5.0(3/16")		1/4"	3/8"	6	170	0.73	1.61	12Pcs/10/2.38'
TS-7050NF(V)(VC)-5H(V)-1	5"	125	12,000	2.5(3/32")		1/4"	3/8"	6	170	0.79	1.74	12Pcs/11/2.3'
TS-7050NF(V)(VC)-5H(V)	5"	125	12,000	5.0(3/16")		1/4"	3/8"	6	170	0.8	1.76	12Pcs/11/2.3'
TS-7050NF(V)(VC)-50H(V)	5"	125	12,000	9.5(3/8")		1/4"	3/8"	6	170	0.85	1.87	12Pcs/11/2.3'
TS-7050NF(V)(VC)-6H(V)-1	6"	150	12,000	2.5(3/32")		1/4"	3/8"	6	170	0.84	1.89	12Pcs/11/2.3'
TS-7050F(V)(VC)-6H(V)	6"	150	12,000	5.0(3/16")		1/4"	3/8"	6	170	0.85	1.87	12Pcs/11/2.3'
TS-7050NF(V)(VC)-60H(V)	6"	150	12,000	9.5(3/8")		1/4"	3/8"	6	170	0.9	1.98	12Pcs/12/2.3'

Jitterbug Sander

Model No.	Sanding Pad		Free Speed (Rpm)	Orbit Diameter		Vacuum Type	Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight		Packing Pcs/Ctn/G.w/Cuft
	inch	mm		mm	inch				Cfm	L/Min.	Kgs	Lbs	
TS-7051S	4"x4-3/10"	100x110	12,000	5.0(3/16")		Clip ,Non	1/4"	3/8"	7	198	0.91	2	12Pcs/14/2.38'
TS-7051	4"x4-3/10"	100x110	12,000	2.5(3/32")		Hook ,Non	1/4"	3/8"	7	198	0.81	1.78	12Pcs/13/2.3'
TS-7051V	4"x4-3/10"	100x110	12,000	5.0(3/16")		Hook , 3 In 1	1/4"	3/8"	7	198	0.82	1.8	12Pcs/13/2.3'