


3W LED POCKET LIGHT

PRODUCT FEATURES:

- LED Consumption : 3W
- LED Quantity : SMD3535 1 PC
- LED Luminous Efficiency : 100LM/W
- LED Luminous : 360LM
- Colour Temperature : 5000K
- IP Grade : IP 20
- Battery : AAA x 3pcs

APPLICATION:

Automotive Repair, Construction Site, Camping,
Hand Carry, Outdoors ...etc.

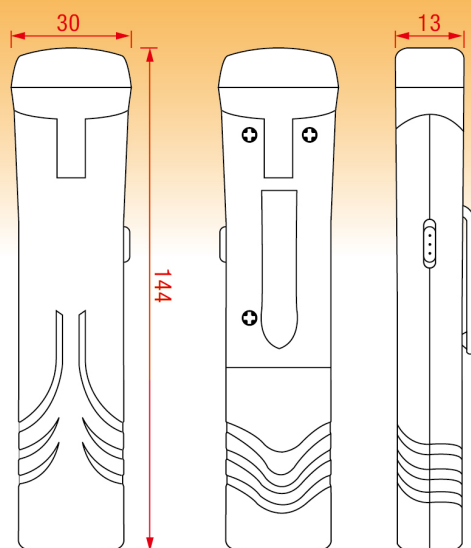

Model No: **BI-L-PTW03**

CATALOG	FUNCTION DESCRIPTION
LED Consumption	3W
LED Quantity	SMD3535 1 PC
LED Luminous Efficiency	100LM/W
LED Luminous	360LM
Colour Temperature	6500K
Color Rendering Index	>80
Working Temperature	-10° ~ +55°

CATALOG	FUNCTION DESCRIPTION
IP Grade	IP 20
working life-span	30000H
Bram Angle	120°
Way of Use	Handheld, Magnetic Attached
Battery	AAA x 3pcs
Dimension(mm)	30 x 13 x 144
Weight	35g (without battery)



GOLDEN ROOT CO., LTD.

No.10, Lane 304, Sec. 1, Chien Kuo S. Rd., Taipei 10656, Taiwan

Tel: 886-2-2702 2266 Fax: 886-2-2705 4819 E-mail: info@golden-root.com.tw



LED FLASHLIGHT & WORKING LIGHT

SUPER WHITE LIGHT

NICHIA | CREE | OSRAM



ITEM




A11/A12 Mini Pocket Flashlight



A32M 3W LED Flashlight



A52 3W LED Flashlight

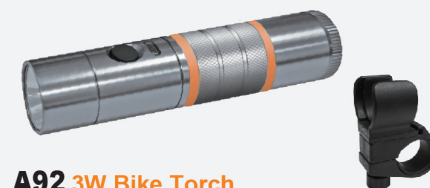

A92 3W Bike Torch

LED	Nichia Super White LED	CREE High Power White LED : XP-G2	CREE High Power White LED : XP-G2	CREE High Power White LED : XP-G2
BRIGHTNESS	90,000mcd	320 lm(Max);150 lm(Typ);75 lm(Min) 100%(5hrs);50%(12hrs),25%(25hrs)	320 lm(Max);150 lm(Typ); 320 lm(twinkling) 100%(5hrs);50%(12hrs)	320 lm(Max);150 lm(Typ); 320 lm(twinkling) 100%(5hrs);50%(12hrs)
MATERIAL	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case
BATTERY LIFE	12 hrs (Max)	5 hrs (Max / Alkaline batteries)	5 hrs (Max / Alkaline batteries)	5 hrs (Max / Alkaline batteries)
DIMENSION(mm)	103(L) x Ø 16(Head) x 16(Dia.)...(±2%)	141(L) x Ø 36.3(Head) x 36.3(Dia.)...(±5%)	140(L) x Ø 36(Head) x 30(Dia.)...(±5%)	130(L) x Ø 27(Head) x 27(Dia.)...(±5%)
LIGHT TYPE	10M High Intensity Beaming Spot	250M Spot	250M Spot	250M Spot
BATTERY TYPE	1 X AAA	3 X AA	3 X AAA	3 X AAA
WATERPROOF	IPX-6 Standard and Shockproof Design	IPX-5 Standard and Shockproof Design	IPX-6 Standard and Shockproof Design	IPX-5 Standard and Shockproof Design
WEIGHT	31.5g (Without Battery)	165g (Without Battery)	130g (Without Battery)	75g (Without Battery)

ITEM



B62A USB Rechargeable Led Flashlight



B62B USB Rechargeable Led Flashlight



A72 5W LED Magnetic Strip Light



BI-L-CM01 Push LED Light

LED	CREE High Power White LED : XP-G2	CREE High Power White LED : XP-G2	E.U. OSRAM High Light White LED CR185	Nichia 0.2W
BRIGHTNESS	320 lm(Max);150 lm(Typ);75 lm(Min) 100%(6hrs);50%(12hrs),25%(14hrs)	320 lm(Max);150 lm(Typ);75 lm(Min) 100%(6hrs);50%(12hrs),25%(14hrs)	500 lm (Max)	—
MATERIAL	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case
BATTERY LIFE	6 hrs (Max)	6 hrs (Max)	4 hrs (Max)	12 hrs
DIMENSION(mm)	440(L) x Ø 36(Head) x 36(Dia.)...(±5%)	453(L) x Ø 17.8(Head) x 36(Dia.)...(±5%)	392.7(L) x 28(Head) x Ø36.3(Dia.)...(±2%)	360(L) x Ø 18(Head) x 20(Dia.)...(±5%)
LIGHT TYPE	—	—	10M Wide 110°	—
BATTERY TYPE	18650 USB Rechargeable Li-ion Battery	18650 USB Rechargeable Li-ion Battery	18650 (2600mAh Li-ion) Rechargeable	LR44x3 pcs 1.5V serial pack, battery capacity:140mA
WATERPROOF	IPX-3	IPX-3	—	IPX-6
WEIGHT	310g	270g	280g	80g



LED FLASHLIGHT & WORKING LIGHT

SUPER WHITE LIGHT

NICHIA | CREE | OSRAM



ITEM




A11/A12 Mini Pocket Flashlight



A32M 3W LED Flashlight



A52 3W LED Flashlight

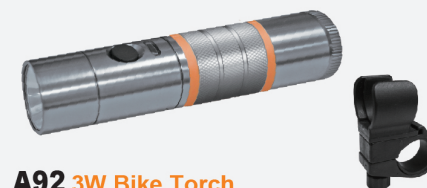

A92 3W Bike Torch

LED	Nichia Super White LED	CREE High Power White LED : XP-G2	CREE High Power White LED : XP-G2	CREE High Power White LED : XP-G2
BRIGHTNESS	90,000mcd	320 lm(Max);150 lm(Typ);75 lm(Min) 100%(5hrs);50%(12hrs),25%(25hrs)	320 lm(Max);150 lm(Typ); 320 lm(twinkling) 100%(5hrs);50%(12hrs)	320 lm(Max);150 lm(Typ); 320 lm(twinkling) 100%(5hrs);50%(12hrs)
MATERIAL	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case
BATTERY LIFE	12 hrs (Max)	5 hrs (Max / Alkaline batteries)	5 hrs (Max / Alkaline batteries)	5 hrs (Max / Alkaline batteries)
DIMENSION(mm)	103(L) x Ø 16(Head) x 16(Dia.)...(±2%)	141(L) x Ø 36.3(Head) x 36.3(Dia.)...(±5%)	140(L) x Ø 36(Head) x 30(Dia.)...(±5%)	130(L) x Ø 27(Head) x 27(Dia.)...(±5%)
LIGHT TYPE	10M High Intensity Beaming Spot	250M Spot	250M Spot	250M Spot
BATTERY TYPE	1 X AAA	3 X AA	3 X AAA	3 X AAA
WATERPROOF	IPX-6 Standard and Shockproof Design	IPX-5 Standard and Shockproof Design	IPX-6 Standard and Shockproof Design	IPX-5 Standard and Shockproof Design
WEIGHT	31.5g (Without Battery)	165g (Without Battery)	130g (Without Battery)	75g (Without Battery)

ITEM



B62A USB Rechargeable Led Flashlight



B62B USB Rechargeable Led Flashlight



A72 5W LED Magnetic Strip Light



BI-L-CM01 Push LED Light

LED	CREE High Power White LED : XP-G2	CREE High Power White LED : XP-G2	E.U. OSRAM High Light White LED CR185	Nichia 0.2W
BRIGHTNESS	320 lm(Max);150 lm(Typ);75 lm(Min) 100%(6hrs);50%(12hrs),25%(14hrs)	320 lm(Max);150 lm(Typ);75 lm(Min) 100%(6hrs);50%(12hrs),25%(14hrs)	500 lm (Max)	—
MATERIAL	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case	Durable Aluminum Alloy Case
BATTERY LIFE	6 hrs (Max)	6 hrs (Max)	4 hrs (Max)	12 hrs
DIMENSION(mm)	440(L) x Ø 36(Head) x 36(Dia.)...(±5%)	453(L) x Ø 17.8(Head) x 36(Dia.)...(±5%)	392.7(L) x 28(Head) x Ø36.3(Dia.)...(±2%)	360(L) x Ø 18(Head) x 20(Dia.)...(±5%)
LIGHT TYPE	—	—	10M Wide 110°	—
BATTERY TYPE	18650 USB Rechargeable Li-ion Battery	18650 USB Rechargeable Li-ion Battery	18650 (2600mAh Li-ion) Rechargeable	LR44x3 pcs 1.5V serial pack, battery capacity:140mA
WATERPROOF	IPX-3	IPX-3	—	IPX-6
WEIGHT	310g	270g	280g	80g

