

MECHANICAL SERVICE TOOL



Compression Tester

Single Blister + Cardboard

Feature Easy Reading 2-5" gauge features colour coated quadruple calibrations 0-300psi, 21kg/cm, 21bar & 2100kpa.
13" durable rubber hose with 14mm/18mm adapter.
6" heavy-duty stem with universal rubber.
Cone adapter fits all plug holes.



Compression Tester

Single Blister + Cardboard

Feature Checks cylinder compression from 0-300psi (0 to 21kg/cm2).
Adapters fit 14 & 18mm spark plug holes and a special air-hold.
Valve is included to easily reset gauge.
Has a 12" rubber hose.



Vacuum/Fuel Pump Tester Kit

Single Blister + Cardboard

Feature Checks for leaky or defective parts in vacuum systems and mechanical pumps.



Screw Type Overhead Valve Spring Compressor

Single Blister + Cardboard

Feature Easily remove valve springs on most cars & light trucks.
Works with cylinder head on or off the engine.
The jaws grip the valve spring in parallel compression.



26x Feeler Gauge Set

Single Blister + Cardboard

Feature Straight blades 85mm long x 13mm wide.
0.0015" - 0.025" blades.
Marked with equivalent metric sizes.



12x Offset Feeler Gauge Set

Single Blister + Cardboard

Feature Offset blade for easy tappet clearance measuring.
0.008", 0.010", 0.012", 0.013", 0.014", 0.015", 0.016", 0.018",
0.019", 0.020", 0.025", 0.026" blades.
Marked with equivalent metric sizes.
Offset blades 100mm long x 13mm wide with 25mm offset tip.

MECHANICAL SERVICE TOOL

2 Arm Brake Cylinder Hone

Single Blister + Cardboard

Feature Range 13mm to 50mm.
28mm stones fitted-medium 220 grit.
Adjustable tension.
Flexible shaft.



3 Arm Brake Cylinder Hone

Single Blister + Cardboard

Feature Range 19mm to 64mm.
28mm stones fitted-medium 220 grit.
Adjustable tension.
Flexible shaft.



10x Bearing Race & Seal Driver Set

Blow Mould Case

Feature Design to allow operator to install bearing cases & seals without damage.
Ideal for installing wheel bearing outer races.
39.5mm – 81mm



Valve Collet Remover & Installer Kit

Blow Mould Case

Feature Quickly removes and installs valve collets on most overhead valve engines with valve stems from 4.5 to 7.5mm & 5/16" to 3/8".
Magnet in tool body captures collets for quick removal and valve disassembly.
Can be used on the car or bench.



Universal Bearing Packer

Single Blister + Cardboard

Feature For use with grease guns, the design incorporates grease nipple at one end which easily adapts to the grease gun coupler.
For bearings in cars, boats, trailers, 4WD's etc with a minimum inner diameter of 12mm(1/2") to a maximum outer diameter of 125mm(5") and height from 6mm(1/4") to 50mm(2").



6x Belt Tensioner Serpentine Tool Set

Single Blister + Cardboard

Feature Contains 3/8" dr Sockets 13, 15, 16, 18mm.
Essential tool for removing & installing timing belts with spring loaded idler pulleys.
Long reach design with multi-positional extension allows access deep into the engine compartment & around obstructions.

MECHANICAL SERVICE TOOL



1/2" Dr 3 Prong Oil Filter Wrench Reversible


Single Blister + Cardboard

Feature Suits oil filters 60mm-100mm.
Non slip nylon strap.

3/8" Dr Spider Type 3 Prong Oil Filter Wrench

Single Blister + Cardboard

Feature Suits oil filters 58mm-95mm.
Compact design great for confined areas.

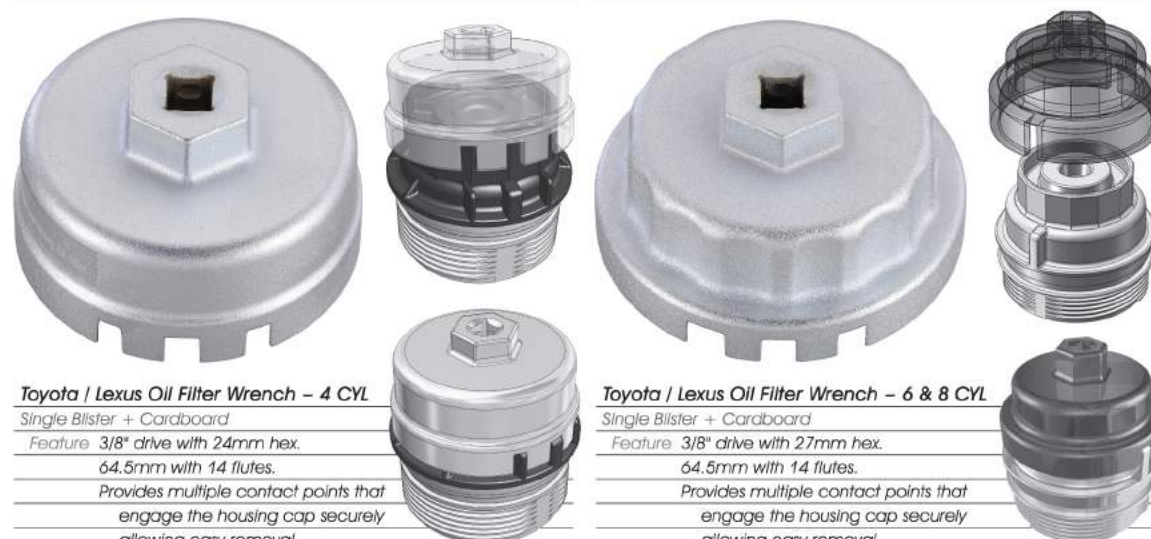

Toyota / Lexus Oil Filter Wrench - 4 CYL

Single Blister + Cardboard

Feature 3/8" drive with 24mm hex.
64.5mm with 14 flutes.
Provides multiple contact points that engage the housing cap securely allowing easy removal.
OE design and quality wrench fits Toyota and Lexus applications.
Compatible with Toyota Corolla and Prius.

Toyota / Lexus Oil Filter Wrench - 6 & 8 CYL

Single Blister + Cardboard

Feature 3/8" drive with 27mm hex.
64.5mm with 14 flutes.
Provides multiple contact points that engage the housing cap securely allowing easy removal.
OE design and quality wrench fits Toyota and Lexus applications.
Compatible with Toyota Aurion, Kluger, Landcruiser and Prado.
Compatible with Lexus GS450H, IS250 and RX350.



Oil Filter Wrench - Strap Type Car

Single Blister + Cardboard

Feature 1/2" square drive.
Suits oil filters up to 150mm.

Oil Filter Pliers

Single Blister + Cardboard

Feature Suits oil filters 55mm(2-1/8") to 125mm(5").

MECHANICAL SERVICE TOOL

Transmission Stop-off Tool

Single Blister + Cardboard

Feature Use this tool to plug the transmission shaft opening when removing the drive shaft, repairing the U-joints or performing general transmission service.
Tapered design suits most vehicles.



Drum Brake Adjusting Tools

Single Blister + Cardboard

Feature 8x130mm(5").
Easy adjustment for most applications.



Twin Hook Seal Puller

Single Blister + Cardboard

Feature Removes oil seal without damage.
Two hook sizes to fit most seal applications.



Universal Clutch Assembly Tool

Single Blister + Cardboard

Feature Design allows easy assembly of clutch whilst on work bench.
Ideal for late-model front when drive vehicles that have no pilot bearing in flywheel.
Supplied with various collars.
Not suitable for double plate clutches.



18x 3/8" Dr Oil Drain Plug Bit Socket Set

Blow Mould Case + Color Box

Feature Helps remove & replace drain plugs in hard to reach locations on differentials, gearboxes & engine sumps.

Content 6x Metric Hex: 8, 9, 10, 12, 14, 17mm
2x SAE Square: 5/16", 3/8"
7x Metric Square: 7, 8, 10, 11, 12, 13, 14mm
1x Female Square: 10mm
1x Triangle: 10mm
1x Spline: 16mm



Multi Drain Tub

Label

Feature Made from high-density polyethylene material.
Resistant to chemicals such as oil, antifreeze and solvents.
Heavy wall construction stays rigid even with hot oil.
Large handles are position to aid carrying and pouring.



Seal Removal / Installation Kit for Wick Seals

Single Blister + Cardboard

Feature Removes and installs upper rear seals without dropping the crankshaft.
Cork screw puller makes it easy to remove the old seal.
Spring steel clip grips the seal firmly as it is pulled into position.
Works on both rope and synthetic rubber material.

MICROMETER TORQUE WRENCH

- Made by heat-treated **Chrome Vanadium Steel** for strength exceeding international specifications.
- Professional plating prevents torque wrenches from corrosion.
- **Reversible switch** enables ratchet to move from either direction.
- **Socket Quick Release System** for easy socket changes.
- Specially designed for working on automotive engine and confined space.
- All torque wrenches are calibrated and tested.



Dual Scale Windows
Nm, ft/lbs



MICROMETER TORQUE WRENCH

Material | Chrome Vanadium Steel

Surface | Matt Finish

Feature | Dual Scale Windows
Ergonomic Handle

Drive (inch)	L (mm)	Description
1/4 (6.35mm)	290	5-25Nm, 3-18ft/lbs Torque
3/8 (9.5mm)	405	10-100Nm, 7.5-75ft/lbs Torque
1/2 (12.7mm)	500	20-200Nm, 15-150ft/lbs Torque
1/2 (12.7mm)	595	60-300Nm, 45-220ft/lbs Torque
3/4 (19.0mm)	970	100-550Nm, 100-600ft/lbs Torque
3/4 (19.0mm)	1150	150-750Nm, 100-700ft/lbs Torque
1" (25.4mm)	1250	200-1000Nm, 100-700ft/lbs Torque



TORQUE WRENCH SAFETY:

- Always store torque wrench in storage blow mould case.
- Always return torque wrench to minimum setting before storage.
- Have torque wrench re-calibrated by a trained professional at least once a year.
- Never mistreat torque wrench by using hammers. Extension handles or similar.



1/2" Dr Angular Torque Gauge

Single Blister + Cardboard

Feature 360° scale.
Support arm included.
Can be used for all torque-to-yield applications (particularly engine head bolts).