


09067233 STRUT COMPRESSOR

Safely and efficiently removes and installs the spring-over steering stabilizer found on most self-steering axles.
Eliminates dangerous ratchet strap and pry-bar methods.
Built-in measuring device enables accurate installation.
3/4" hex drive engineered for use with up to a 1/2" impact.
15" to 25" center-to-center working range.



835-4302 AUTOMOTIVE AIR - CONDITIONING PIPE LEAK PROOF JOINT GROUP

- Specially designed for various A/C system fitting and tube from 1/4" to 7/8".
- Contents 2 clamps with gaskets 3/8", 1/2", 5/8", 3/4" each 2PCS.
- Various adaptor for testing leakage on each part of air condition system.
- Suitable for testing drier, expansion valve, compressor, air condensor, and evaporator etc....
- Applicable: Universal type.



08060922 RELEASE TOOL

Materia: Cr-Mo Steel
Feature:
Used in conjunction for releasing quick-connecting locks on A/C lines.
Used on Porsche Macan.
OEM Reference No.: T4149/50



030609275 COOLANT PUMP THERMOSTAT KEY -VW/AUDI

Introduction:
Removal and assembly of water pump thermostat.
Application:
Removal and installation of coolant pump thermostat.
Type / model: Audi A3 2013 >, Golf 2013 >
Assembly group: 4-cyl. injection engine (1.4 l direct injection engine, turbocharger)
OEM No.: T10508



030309111 VOLVO TRUCK RADIATOR QUICK ADAPTOR

This quick coupling female adaptor is used to purge or refill radiator fluid on Volvo trucks. It provides a quick and clean method of fluid transfer and prevents an unwanted spillage.
Applicable: Volvo trucks. OEM No: 9996049



100433202 TRANSMISSION OIL COOLER LINE DISCONNECT FOR FORD

Two Sizes, 3/8" and 1/2" are Designed to Disconnect Transmission Cooler Lines.



178-1010C COOLANT EXCHANGER

Dimension: 690x480x1420mm
Weight: 38.2kg





Automotive Special Service Tools

A/C & COOLANT TOOLS

176-C4B
176-C4C

8" HOSE CLAMP PLIER WITH SPRING TOOL 6" HOSE CLAMP PLIER WITH SPRING TOOL


- Ideal for Brake & Fuel lines also suitable for coolant hoses.
- Easy & simple handling, with the basic functions of clamping and releasing.



040318B15C SPECIAL SOCKET FOR AIR INTAKE HOSE CLAMP

For removal, replacement or tightening the safety clamp in the intake area, near the throttle flap.

Suitable for H4Bt 0.9L petrol turbo engine form 2012			
Smart Fortwo	Smart Forfour	Renault Twingo	Renault Clio
Renault Captur	Dacia Sandero	Dacia Logan	Nissan Micra




822-0068 HOSE CLIP TOOL

- The clamp tool designed to get to confined spaces hose clips.
- Jaw capacity : 0-40 mm diameter
- Can be use with 3/8" driver Ratchet, Flexible Extension driver --- etc.




0408830588B HOSE CLAMP REMOVAL TOOL

- Universally designed for the loosening / opening of HENN clamps as found on coolant hoses / charge air hoses in passenger cars.
- Suitable for VW-Audi, Seat, Skoda, BMW, Peugeot, Citroën, Dacia, Fiat, Ford, Kia, Lexus, Mazda, Mercedes, Nissan, Opel/Vauxhall, Porsche, Renault, Toyota, Volvo etc.

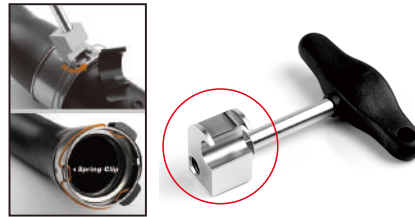

140362508A CHANGEABLE HOSE CLAMP PLIERS

- Patent design cable changeable structure for easily & quickly changing cable for different hose clamp.
- 1pc 670mm length cable for standard hose clamp, opening range from 3mm to 52mm.
- 1pc 635mm length cable for clip-rtype hose clamp, opening range from 0mm to 24mm.
- 1pc 670mm length patent design dual side clamp for spring type & truck hose clamp, opening range from 0mm to 70mm.



140362508 CHANGEABLE HOSE CLAMP PLIERS

- Patent design cable changeable structure for easily & quickly changing cable for different hose clamp.
- 1pc 670mm length cable for standard hose clamp, opening range from 3mm to 52mm



140303AHC AXIAL HOSE CLAMP PLIER

- The patented ratcheting feature provides user with infinite locking positions.
- Double hinged locking mechanism adds leverage for less use fatigue.
- Fine adjustment of locking lever prevents damage to plastic hose clamps.
- Working on spring clamps ranging from 3/4"~2-3/4"
- Material :steel & alloy
- Length: 185mm
- Weight: 470g

