



TG-7130(M)
0.3Hp 1/4" (6mm) Mini Air Die Grinder



TG-7131(M)
0.6Hp 1/4" (6mm) Air Die Grinder



TS-7137
0.3Hp 2" Air Angle Sander



TG-7133(M)
TG-7133F(M) (Front Exhaust)
0.3Hp 1/4" (6mm) Air Die Grinder With 1" Extended Type



TG-7132 (M)
0.9Hp 1/4" (6mm) Air Die Grinder



TS-7139
0.3Hp 2" Air Angle Orbital Sander



TG-7134(M)
TG-7134F(M) (Front Exhaust)
0.3Hp 1/4" (6mm) Air Die Grinder With 3" Extended Type




TG-7132F(M)
0.9Hp 1/4" (6mm) Air Die Grinder (Front Exhaust)



TD-7138
0.3Hp 3/8" Air Angle Drill



TG-7130(M)K
TG-7131(F)(M)K
TG-7132(M)K
1 Pc Grinder
1 Pc Collect
2 Pcs Wrench
10 Pcs Grinding Stone

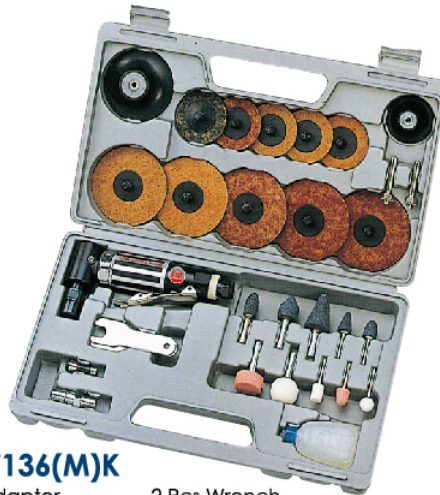

TG-7136(M)K
1 Pc Adapter
1 Pc TG-7136 (M)
1 Pc Oil Pot
1 Pc 2" Rubber Pad
1 Pc 3" Rubber Pad
2 Pcs Wrench
2 Pcs Linkage Rod
5 Pcs 2" Mon-Woven Sading Paper
5 Pcs 3" Mon-Woven Sading Paper
Packing: 10/Ctn/17/1.6'



TB-7141
0.3Hp 2" Air Cutting Saw



TG-7136(M)
0.3Hp 1/4" (6mm) Air Angle Die Grinder

Specification (at 90 PSI)

Model No.	Free Speed (Rpm)	Horse Power		Collect Size		Avg. Air Consumption Cfm	Overall Length		Air Inlet (Pt/Npt)	Air Hose (I.D.)
		Kw	HP	inch	mm		inch	mm		
TG-7130(M)	25,000	0.23	0.3	1/4"	6	6	6-1/4"	160	1/4"	1/4"
TG-7131(M)	20,000	0.42	0.6	1/4"	6	8	6-3/8"	163	1/4"	3/8"
TG-7132(M)	18,000	0.65	0.9	1/4"	6	10	7-1/4"	184	1/4"	3/8"
TG-7132(F)(M)	16,000	0.65	0.9	1/4"	6	10	7"	178	1/4"	3/8"
TG-7133F(M)	25,000	0.23	0.3	1/4"	6	6	7-3/4"	200	1/4"	1/4"
TG-7134F(M)	25,000	0.23	0.3	1/4"	6	6	9-1/4"	235	1/4"	1/4"
TG-7136(M)	18,000	0.23	0.3	1/4"	6	6	6-1/2"	165	1/4"	1/4"
TS-7137	15,000	0.23	0.3	2" Pad		6	6-1/2"	165	1/4"	1/4"
TD-7138	15,000	0.23	0.3	3/8" Chuck		6	6-1/2"	165	1/4"	1/4"
TS-7139	15,000	0.23	0.3	2" Pad		6	6-1/2"	165	1/4"	1/4"
TB-7141	15,000	0.23	0.3	2" Saw		6	7-3/4"	200	1/4"	3/8"



TG-3170
Roll Throttle Type Micro
Grinder (54,000 Rpm)



TG-3180
Roll Throttle Type Micro
Grinder (70,000 Rpm)



TG-3190
30 mm 120° Roll Throttle Type
Micro Grinder (22,000 Rpm)



TG-3192
30MM Mini 90° Degree
Angle Grinder & Sander



TG-3160
0.01Hp Micro Grinder
(65,000 Rpm)



TG-G38L(G)
0.38Hp Extension Micro
Grinder (25,000 Rpm)



TG-3150
0.01Hp Micro Grinder
(40,000 Rpm)



TG-G38(N)
0.38Hp Micro Grinder
(25,000 Rpm)



TG-7309(M)
TG-7309L(M)
Industrial Roll (Lever)
Throttle Type Grinder
(22,000 Rpm)



TG-250(G)
Industrial Lever (Roll)
Throttle Type Grinder
(25,000 Rpm)



TG-251
TG-251(F)(Front Exhaust)
Industrial Lever
Type Grinder (20,000 Rpm)



TG-38N(S)
TG-38NL(Extension)
Industrial Lever (Roll) Throttle
Type Air Grinder

Specification (at 90 PSI)

Model No.	Capacity		Free Speed (Rpm)	Overall Length		Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight	
	inch	mm		inch	mm			Cfm	L/Min.	Kgs	Lbs
TG-3150(M)	1/4"	6.0	40,000	6-1/2"	165	1/4"	3/8"	3	85	0.38	0.8
TG-3160(M)	1/8"	3.0	65,000	6-1/4"	160	1/4"	1/4"	2	57	0.1	0.2
TG-3170(M)	1/8"	3.0	54,000	5-1/4"	132	1/4"	1/4"	2	57	0.2	0.5
TG-3180(M)	1/8"	3.0	70,000	5-1/4"	132	1/4"	1/4"	2	57	0.2	0.5
TG-3190		30	22,000	5-1/3"	136	1/4"	1/4"	2	57	0.3	0.6
TG-3192		30	21,000	6-1/4"	160	1/4"	1/4"	2	57	0.23	0.5
TG-250(G)(M)	1/4"	6.0	25,000	5-7/10"	145	1/4"	3/8"	8.8	250	0.5	1.1
TG-251(F)(M)	1/4"	6.0	20,000	6-7/10"	170	1/4"	3/8"	10	280	0.55	1.22
TG-G38(G)(M)	1/4"	6.0	25,000	6-5/8"	172	1/4"	3/8"	5	140	0.8	1.72
TG-38N(S)(M)	1/4"	6.0	20,000	6-3/5"	168	1/4"	3/8"	3	85	0.6	1.32
TG-G38NL(M)	1/4"	6.0	20,000	12-7/10"	323	1/4"	3/8"	3	85	0.93	1.05
TG-7309(L)(M)	1/4"	6.0	22,000	6-1/2"	165	1/4"	3/8"	5	140	0.6	1.32



TG-7300
0.25Hp 2" Angle Grinder
TG-7300L
With Lever Type Throttle



TG-7301
0.35Hp 4" Mini Angle Grinder
TG-7301L
With Lever Type Throttle



TG-7302
0.36Hp 4" Angle Grinder
TG-7302L
With Lever Type Throttle



TG-7303
0.5HP 5" Angle Grinder
TG-7303L
With Lever Type Throttle



TG-7044L
4" Angle Grinder
TG-7044G
With Roll Type Throttle



TG-7045L
5" Angle Grinder
TG-7045G
With Roll Type Throttle



TG-7047L :7" Angle Grinder
TG-7047G:With Roll Type Throttle



TG-7049G :9" Angle Grinder
TG-7049L :With Lever Type



TG-7080
TG-7090
7"/9" Vertical Grinder



TG-7091
9" Vertical Grinder



TG-7092
TG-7093
9" Vertical Grinder



TG-7094
TG-7095
6" Vertical Grinder

Specification (at 90 PSI - 6.3 bar)

Model No.	Capacity		Free Speed (Rpm)	Overall Length		Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight	
	inch	mm		inch	mm			Cfm	L/Min.	Kgs	Lbs
TG-7044L(G)	4"	100	13,600	8-3/16"	208	1/4"	3/8"	6	170	1.5	3.3
TG-7045L(G)	5"	125	10,900	8-3/16"	208	1/4"	3/8"	6	170	1.6	3.5
TG-7047L(G)	7"	180	7,600	10"	254	3/8"	1/2"	8	226	3.1	6.8
TG-7080	7"	180	7,000	13-2/5"	340	1/2"	1/2"	8	226	3.9	8.6
TG-7090	9"	229	6,000	13-2/5"	340	1/2"	1/2"	8	226	3.9	8.6
TG-7091	9"	229	6,000	14"	355	1/2"	1/2"	8	226	4.97	11.0
TG-7092	9"	229	4,500	11"	279	1/2"	3/4"	10	283	5.8	12.8
TG-7093	9"	229	5,900	11"	279	1/2"	3/4"	10	283	5.8	12.8
TG-7094	6"	150	4,500	11"	279	1/2"	3/4"	10	283	5.9	13.0
TG-7095	6"	150	6,000	11"	279	1/2"	3/4"	10	283	5.9	13.0
TG-7300(L)	2"	50	22,000	5-1/2"	140	1/4"	3/8"	3	85	0.53	1.17
TG-7301(L)	4"	100	13,000	7-1/2"	170	1/4"	3/8"	4	113	0.96	2.1
TG-7302(L)	4"	100	12,000	8-1/2"	228	1/4"	3/8"	5	141	1.6	3.52
TG-7303(L)	5"	127	12,000	8-7/10"	220	1/4"	3/8"	5	141	1.6	3.52
TG-7049(G)	9"	229	5,900	12-1/5"	310	3/8"	1/2"	10	283	3.3	7.27



TG-13(M)
1/8" (3mm) Mini Roll Type
Throttle Gringer
TG-13L: Lever Type Throttle



TG-26(M)
1/4" (6mm) Medium Roll Type
Throttle Gringer
TG-26L: Lever Type Throttle



TG-50(M)
1/4" (6mm) Roll Type
Throttle Gringer
TG-50L: Lever Type Throttle



TG-130(M)
1/8" (3mm) Mini Roll Type
Throttle Extended 5" Die Grinder
TG-130L(M)
With Lever Type Throttle



TG-260(M)
1/4" (6mm) Industrial Roll Type
Throttle Extended Air Die Grinder
TG-260L(M)
With Lever Type Throttle



TG-500(M)
1/4" (6mm) Roll Type
Throttle Extended 3" Die Grinder
TG-500L(M)
With Lever Type Throttle



TG-26X(M)-1S
1/4" (6mm) Die Grinder
With Silent Hose
TG-26X(M)-1F
Without Silent Hose



TG-7082
3" Industrial Horizontal
Grinder
TG-7082L
With Lever Type Throttle



TG-7083(M)
1/4" (6mm) Industrial
Horizontal Grinder
TG-7083L(M)
With Lever Type Throttle

Specification (at 90 PSI)

Model No.	Capacity		Free Speed (Rpm)	Overall Length		Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight	
	inch	mm		inch	mm			Cfm	L/Min.	Kgs	Lbs
TG-13(L)	1/8"	3	30,000	6-7/32"	158	1/4"	1/4"	3	85	0.3	0.6
TG-130L(M)	1/8"	3	30,000	10"	252	1/4"	1/4"	3	85	0.5	1.1
TG-26(L)	1/4"	6	24,000	7-3/64"	179	1/4"	5/16"	4	113	0.6	1.32
TG-26X(M)	1/4"	6	24,000	6-7/10"	170	1/4"	3/8"	4	113	0.5	1.1
TG-260(L)	1/4"	6	24,000	6-7/10"	264	1/4"	5/16"	4	113	0.73	1.6
TG-50(L)	1/4"	6	18,000	10"	180	1/4"	3/8"	4.5	127	0.7	1.55
TG-500(L)	1/4"	6	18,000	7"	180	1/4"	3/8"	4.5	127	0.85	1.87
TG-7082(L)	3"	75	15,000	10-3/5"	270	3/8"	1/2"	8	226	1.37	3
TG-7083(L)	1/4"	6	15,000	10-23/32"	272	3/8"	1/2"	8	226	1.3	2.86



TG-20G(M)
1/4" (6mm) Angle Die Grinder
TG-20L :
With Lever Type Throttle



TG-2G
2" Angle Grinder
TG-2L :
With Lever Type Throttle



TG-2KG
2" Angle Grinder/Sander
TG-2KL :
With Lever Type Throttle



TG-4MG
4" Mini Angle Grinder
TG-4ML :
With Lever Type Throttle



TG-4G
4" Angle Grinder
TG-4L :
With Lever Type Throttle



TG-5G
5" Angle Grinder
TG-5L :
With Lever Type Throttle



TG-6AG
6" Angle Grinder
TG-6AL :
With Lever Type Throttle



TG-7G
7" Angle Grinder
TG-7L :
With Lever Type Throttle



TG-70G
3 IN 1 Angle Grinder/Sander/Wire Brush
TG-70L :
With Lever Type Throttle



TG-9G
9" Angle Grinder
TG-9L :
With Lever Type Throttle

Specification (at 90 PSI)

Model No.	Capacity		Free Speed (Rpm)	Overall Length		Air Inlet (Pt/Npt)	Air Hose (I.D.)	Avg. Air Consumption		Net Weight	
	inch	mm		inch	mm			Cfm	L/Min.	Kgs	Lbs
TG-2G(L)	2"	50	15,000	6-3/16"	157	1/4"	3/8"	5	141	0.65	1.43
TG-20G(L)	1/4"	6	15,000	6-3/16"	157	1/4"	3/8"	5	141	0.6	1.32
TG-2KG	2"	76	15,000	6-3/16"	157	1/4"	3/8"	5	141	0.7	1.54
TG-4G(L)	4"	100	13,500	8-19/50"	213	3/8"	1/2"	6	170	1.8	3.96
TG-4MG(L)	4"	100	15,000	7-1/10"	180	1/4"	3/8"	5.5	156	1.3	2.86
TG-5G(L)	5"	127	12,000	8-19/50"	213	3/8"	1/2"	6	170	2	4.4
TG-6AG(L)	6"	152	8,400	10"	252	1/2"	1/2"	8	226	2.7	5.95
TG-7G(L)	7"	178	7,000/7,600/8,400	10"	252	1/2"	1/2"	8	226	2.9	6.4
TG-70G(L)	7"	178	7,000/7,600/8,400	10"	252	1/2"	1/2"	8	226	3	6.6
TG-9G(L)	9"	230	5,900	12-4/25"	309	1/2"	1/2"	12	340	4.4	9.7