

047-21939 0.5 HP 2" & 3" ANGLE SANDER

Benefits

- Ergonomic grip.

Features

- Patented low noise design.
- Low profile enables operation in tight areas.



Pad Size	Pad Size	Length	Noise Level	Rotation Speed	Air Inlet	Hose Size	Avg. Air Cons.
In.	Lbs.(kg)	in.(mm)	dBA	RPM	in.	in.(mm)	CFM
2"/3"	1.52(0.7)	7.7(195)	84	13,000	1/4	3/8(10)	3.3

047-2521 0.7HP FLEX HEAD REVERSIBLE CUT-OFF TOOL

Benefits

- Ergonomic grip.
- Safe & Convenient.



Features

- Patented reversible switch: US 6,932,165; I 262840.
- Patented Low-noise design.

The Flex head with 3-position directs sparks away from operator. (U.S. Patent).

- Built-in speed regulator.
- The locking clamp keeps the flex head in fixed position for safety

Flex Head Design
Adjustable 25° up and 25°
down by using quick lever

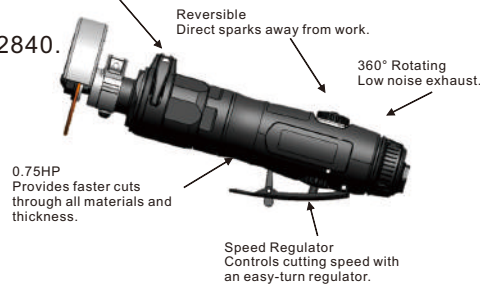

Pad Size	Pad Size	Length	Rotation Speed	Air Inlet	Hose Size	Avg. Air Cons.
In.	Lbs.(kg)	in.(mm)	RPM	in.	in.(mm)	CFM
3	2.42(1.1)	9.8(249)	16,000	1/4	3/8(10)	3.6

047-0914 047-0915 1.8 HP INDUSTRIAL ANGLE GRINDER

Benefit

- Ergonomic grip
- The vibration damping side handle decrease the vibration significantly, user can hardly feel vibration.

Features:

- The locations of spindle lock and handgrip are left and right interchangeable, which is lefty-friendly.
- Spindle lock enables easier and faster wheel changeovers.
- The swivel-guard adjustable up to 55°
- Safety throttle prevents accident start up.
- High quality bearings and high accuracy alloy steel bevel gears provide stable and long tool life.



Pad Size	Pad Size	Length	Rotation Speed	Air Inlet	Hose Size	Avg. Air Cons.
In.	Lbs.(kg)	in.(mm)	RPM	in.	in.(mm)	CFM
4"	4.1(1.9)	9.8(249)	13,500	3/8	3/8(10)	6.2
5"	4.4(2)	9.8(249)	12,000	3/8	3/8(10)	6.2